

Hybrid Approximate Message Passing with Applications to Structured Sparsity

Sundeep Rangan, Alyson K. Fletcher, Vivek K Goyal, and Philip Schniter

Abstract—Gaussian and quadratic approximations of message passing algorithms on graphs have attracted considerable recent attention due to their computational simplicity, analytic tractability, and wide applicability in optimization and statistical inference problems. This paper presents a systematic framework for incorporating such approximate message passing (AMP) methods in general graphical models. The key concept is a partition of dependencies of a general graphical model into strong and weak edges, with the weak edges representing interactions through aggregates of small, linearizable couplings of variables. AMP approximations based on the Central Limit Theorem can be readily applied to the weak edges and integrated with standard message passing updates on the strong edges. The resulting algorithm, which we call hybrid generalized approximate message passing (Hybrid-GAMP), can yield significantly simpler implementations of sum-product and max-sum loopy belief propagation. By varying the partition of strong and weak edges, a performance–complexity trade-off can be achieved. Group sparsity problems are studied as an example of this general methodology where there is a natural partition of edges.

Index Terms—belief propagation, estimation, group sparsity, max-sum algorithm, maximum a posteriori probability, minimum mean-squared error, optimization, simultaneous sparsity, sum-product algorithm

I. INTRODUCTION

Message passing algorithms on graphical models have become widely-used in high-dimensional optimization and inference problems in a range of fields [1], [2]. The fundamental principle of graphical models is to factor high-dimensional problems into sets of smaller problems of lower dimension. The factorization is represented via a graph where the problem variables and factors are represented by the graph vertices, and the dependencies between them represented by edges. Message passing methods such as loopy belief propagation (BP) use this graphical structure to perform approximate inference or optimization in an iterative manner. In each iteration, inference or optimization is performed “locally” on the sub-problems associated with each factor, and “messages” are passed between the variables and factors to account for the coupling between the local problems.

Although effective in a range of problems, loopy BP is only as computationally simple as the problems in the constituent

factors. If the factors themselves are of high dimensions, exact implementation of loopy BP will be computationally intractable.

To reduce the complexity of loopy BP, this paper presents a *Hybrid-generalized approximate message passing* (Hybrid-GAMP) algorithm for what we call *graphical models with linear mixing*. The basic idea is that when factors depend on large numbers of variables, the dependencies are often through aggregates of small, linearizable perturbations. In the proposed graphical model with linear mixing, these linear, weak interactions are identified by partitioning the graph edges into *weak* and *strong* edges, with the dependencies on the weak edges being described by a linear transform. Under the assumption that the components of the linear transform are small, it is argued that the computations for the messages of standard loopy BP along the weak edges can be significantly simplified. The approximate message passing along with the weak edges are integrated with the standard loopy BP messages on the strong edges.

We illustrate this Hybrid-GAMP methodology in the context of two common variants of loopy BP: the sum-product algorithm for inference (e.g., computation of a posterior mean) and the max-sum algorithm for optimization (e.g., computation of a posterior mode). For the sum-product loopy BP algorithm, we show that the messages along the weak edges can be approximated as Gaussian random variables and the computations for these messages can be simplified via the Central Limit Theorem. For max-sum loopy BP, we argue that one can use quadratic approximations of the messages and perform the computations via a simple least-squares solution.

These approximations can dramatically simplify the computations. The complexity of standard loopy BP generically grows exponentially with the maximum degree of the factor nodes. With the GAMP approximation, however, the complexity is exponential only in the maximum degree from the strong edges, while it is linear in the number of weak edges. As a result, Hybrid-GAMP algorithms on a graphical model with linear mixing can remain tractable even with very large numbers of weak, linearizable interactions.

Gaussian and quadratic approximations for message passing algorithms with linear dependencies are, of course, not new. The purpose of this paper is to provide a systematic and general framework for these approximations that incorporate and extend many earlier algorithms. For example, many previous works have considered Gaussian approximations of loopy BP for the problem of estimating vectors with independent components observed through noisy, linear measurements [3]–[9]. In the terminology of this paper, these algorithms apply to

S. Rangan (email: srangan@poly.edu) is with Polytechnic Institute of New York University, Brooklyn, NY.

A. K. Fletcher (email: alyson@eecs.berkeley.edu) is with the Department of Electrical Engineering and Computer Sciences, University of California, Berkeley.

V. K. Goyal (email: vgoyal@mit.edu) is with the Department of Electrical Engineering and Computer Science and the Research Laboratory of Electronics, Massachusetts Institute of Technology.

P. Schniter (email: schniter@ece.osu.edu) is with the Department of Electrical and Computer Engineering, The Ohio State University.

graphs where all the non-trivial edges are weak. As discussed in Section III, by enabling graphs that have mixes of both strong and weak edges, the framework of this paper can significantly generalize these methods. For example, instead of the unknown vector simply having independent components, the presence of strong edges can enable the vector to have any prior describable with a graphical model.

The approach here of combining approximate message passing methods and standard graphical model with linear mixing is closest to the methods developed in [10]–[13] for wavelet image denoising and turbo equalization. These works also considered graphical models that had both linear and nonlinear components, and applied approximate message passing techniques along the lines of [7], [8] to the linearizable portions while maintaining standard BP updates in the remainder of the graph. The use of approximate message passing methods on portions of a factor graph has also been applied with joint parameter estimation and decoding for CDMA multiuser detection in [14]; in a wireless interference coordination problem in [15], and proposed in [16, Section 7] in the context of compressed sensing. The framework presented here unifies and extends all of these examples and thus provides a systematic procedure for incorporating Gaussian approximations of message passing in a modular manner in general graphical models.

II. GRAPHICAL MODEL PROBLEMS WITH LINEAR MIXING

Let $\mathbf{x}$ and $\mathbf{z}$ be real-valued block column vectors

$$\mathbf{x} = (\mathbf{x}_1^*, \dots, \mathbf{x}_n^*)^*, \quad \mathbf{z} = (\mathbf{z}_1^*, \dots, \mathbf{z}_m^*)^*, \quad (1)$$

and consider a function of these vectors of the form

$$F(\mathbf{x}, \mathbf{z}) := \sum_{i=1}^m f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i), \quad (2)$$

where, for each i , $f_i(\cdot)$ is a real-valued function; $\alpha(i)$ is a subset of the indices $\{1, \dots, n\}$; and $\mathbf{x}_{\alpha(i)}$ is the concatenation of the vectors $\{\mathbf{x}_j, j \in \alpha(i)\}$. We will be interested in computations on this function subject to linear constraints of the form

$$\mathbf{z}_i = \sum_{j=1}^n \mathbf{A}_{ij} \mathbf{x}_j = \mathbf{A}_i \mathbf{x}, \quad (3)$$

where each $\mathbf{A}_{ij}$ is a real-valued matrix and $\mathbf{A}_i$ is the block column matrix with components $\mathbf{A}_{ij}$. We will also let $\mathbf{A}$ be the block matrix with components $\mathbf{A}_{ij}$ so that we can write the linear constraints as $\mathbf{z} = \mathbf{A}\mathbf{x}$.

The function $F(\mathbf{x}, \mathbf{z})$ is naturally described via a graphical model as shown in Fig. 1. Specifically, we associate with $F(\mathbf{x}, \mathbf{z})$ a bipartite *factor graph* $G = (V, E)$ whose vertices V consist of n *variable nodes* corresponding to the (vector-valued) variables $\mathbf{x}_j$, and m *factor nodes* corresponding to the factors $f_i(\cdot)$ in (2). There is an edge $(i, j) \in E$ in the graph if and only if the variable $\mathbf{x}_j$ has some influence on the factor $f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i)$. This influence can occur in one of two mutually exclusive ways:

- The index j is in $\alpha(i)$, so that the variable $\mathbf{x}_j$ directly appears in the sub-vector $\mathbf{x}_{\alpha(i)}$ in the factor $f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i)$.

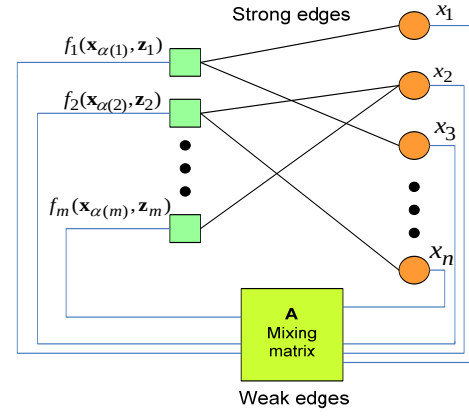


Fig. 1. Factor graph representation of the linear mixing estimation and optimization problems. The variable nodes (circles) are connected to the factor nodes (squares) either directly (strong edges) or via the output of the linear mixing matrix $\mathbf{A}$ (weak edges).

In this case, (i, j) will be called a *strong edge*, since $\mathbf{x}_j$ can have an arbitrary and potentially-large influence on the factor.

- The matrix $\mathbf{A}_{ij}$ is nonzero, so that $\mathbf{x}_j$ affects $f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i)$ through its linear influence on $\mathbf{z}_i$ in (3). In this case, (i, j) will be called a *weak edge*, since the approximations we will make in the algorithms below assume that $\mathbf{A}_{ij}$ is small. The set of weak edges into the factor node i will be denoted $\beta(i)$.

Together $\alpha(i)$ and $\beta(i)$ comprise the set of all indices j such that the variable node $\mathbf{x}_j$ is connected to the factor node $f_i(\cdot)$ in the graph G . The union $\partial(i) = \alpha(i) \cup \beta(i)$, is thus the neighbor set of $f_i(\cdot)$. Similarly, for any variable node $\mathbf{x}_j$, we let $\alpha(j)$ be the set of indices i such that the factor node $f_i(\cdot)$ is connected to $\mathbf{x}_j$ via a strong edge, and let $\beta(j)$ be the set of indices i such that there is a weak edge. We let $\partial(j) = \alpha(j) \cup \beta(j)$ be the union of these sets, which is the neighbor set of $\mathbf{x}_j$.

Given these definitions, we are interested in two problems:

- **Optimization problem P-OPT:** Given a function $F(\mathbf{x}, \mathbf{z})$ of the form (2) and a matrix $\mathbf{A}$, compute the maxima:

$$\hat{\mathbf{x}} = \arg \max_{\mathbf{x} : \mathbf{z} = \mathbf{A}\mathbf{x}} F(\mathbf{x}, \mathbf{z}), \quad \hat{\mathbf{z}} = \mathbf{A}\hat{\mathbf{x}}. \quad (4)$$

Also, for each j , compute the *marginal value function*

$$\Delta_j(\mathbf{x}_j) := \max_{\mathbf{x}_{\setminus j} : \mathbf{z} = \mathbf{A}\mathbf{x}} F(\mathbf{x}, \mathbf{z}), \quad (5)$$

where the maximization is over all variables $\mathbf{x}_r$ for $r \neq j$.

- **Expectation problem P-EXP:** Given a function $F(\mathbf{x}, \mathbf{z})$ of the form (2), a matrix $\mathbf{A}$, and *scale factor* $u > 0$, define the joint distribution

$$p(\mathbf{x}) := \frac{1}{Z(u)} \exp[uF(\mathbf{x}, \mathbf{z})], \quad \mathbf{z} = \mathbf{A}\mathbf{x} \quad (6)$$

where $Z(u)$ is a normalization constant called the partition function (it is a function of u). For this distribution, compute the expectations

$$\hat{\mathbf{x}} = \mathbb{E}[\mathbf{x}], \quad \hat{\mathbf{z}} = \mathbb{E}[\mathbf{z}]. \quad (7)$$

Also, for each j , compute the log marginal

$$\Delta_j(\mathbf{x}_j) := \frac{1}{u} \log \int \exp[uF(\mathbf{x}, \mathbf{z})] d\mathbf{x}_{\setminus j}, \quad (8)$$

where the integral is over all variables $\mathbf{x}_r$ for $r \neq j$.

Both problems P-OPT and P-EXP naturally arise in statistical inference: Suppose we are given a probability distribution $p(\mathbf{x})$ of the form (6) for some function $F(\mathbf{x}, \mathbf{z})$. The function $F(\mathbf{x}, \mathbf{z})$ may depend implicitly on some observed vector $\mathbf{y}$, so that $p(\mathbf{x})$ represents the posterior distribution of $\mathbf{x}$ given $\mathbf{y}$. In this context, the solution $(\hat{\mathbf{x}}, \hat{\mathbf{z}})$ to the problem P-OPT is precisely the *maximum a posteriori* (MAP) estimate of $\mathbf{x}$ and $\mathbf{z}$ given the observations $\mathbf{y}$. Similarly, the solution $(\hat{\mathbf{x}}, \hat{\mathbf{z}})$ to the problem P-EXP is precisely the *minimum mean squared error* (MMSE) estimate when $u = 1$. For P-EXP, the function $\Delta_j(\mathbf{x}_j)$ is the log marginal distribution of $\mathbf{x}_j$.

The two problems are related: A standard large deviations argument [17] shows that, under suitable conditions, as $u \rightarrow \infty$ the distribution $p(\mathbf{x})$ in (6) concentrates around the maxima $(\hat{\mathbf{x}}, \hat{\mathbf{z}})$ in the solution to the problem P-OPT. As a result, the solution $(\hat{\mathbf{x}}, \hat{\mathbf{z}})$ to P-EXP converges to the solution to P-OPT.

A. Further Assumptions and Notation

In the analysis below, we will assume that, for all factor nodes $f_i(\cdot)$, the strong and weak neighbors, $\alpha(i)$ and $\beta(i)$, are disjoint. That is,

$$\alpha(i) \cap \beta(i) = \emptyset. \quad (9)$$

This assumption introduces no loss of generality: If an edge (i, j) is both weak and strong, we can modify the function $f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i)$ to “move” the influence of $\mathbf{x}_j$ from the term $\mathbf{z}_i$ into the direct term $\mathbf{x}_{\alpha(i)}$. For example, suppose that for some i ,

$$\mathbf{z}_i = \mathbf{A}_{i1}\mathbf{x}_1 + \mathbf{A}_{i3}\mathbf{x}_3 + \mathbf{A}_{i4}\mathbf{x}_4$$

and $\alpha(i) = \{1, 2\}$. In this case, the edge $(i, 1)$ is both strong and weak. That is, the function $f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i)$ depends on the variable $\mathbf{x}_1$ both directly through $\mathbf{x}_{\alpha(i)}$ and through $\mathbf{z}_i$. To satisfy the assumption (9), we define a new $\mathbf{z}_i$

$$\mathbf{z}_i^{\text{new}} = \mathbf{A}_{i3}\mathbf{x}_3 + \mathbf{A}_{i4}\mathbf{x}_4,$$

and new function $f_i(\cdot)$

$$\begin{aligned} f_i^{\text{new}}(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i^{\text{new}}) &= f_i^{\text{new}}((\mathbf{x}_1, \mathbf{x}_2), \mathbf{z}_i^{\text{new}}) \\ &= f_i((\mathbf{x}_1, \mathbf{x}_2), \mathbf{A}_{i1}\mathbf{x}_1 + \mathbf{z}_i^{\text{new}}). \end{aligned}$$

With these definitions,

$$f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i) = f_i^{\text{new}}(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i^{\text{new}}).$$

Therefore we can replace $f_i(\cdot)$ and $\mathbf{z}_i$ with $f_i^{\text{new}}(\cdot)$ and $\mathbf{z}_i^{\text{new}}$ and obtain an equivalent problem.

Even when the dependence of a factor $f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i)$ on a variable $\mathbf{x}_j$ is only through the linear term $\mathbf{z}_i$, we may still wish to “move” the dependence to a strong edge. The reason is that the GAMP algorithm below assumes that the linear dependence is weak, that is, $\mathbf{A}_{ij}$ is small. If that is not the case, the dependence can be treated as strong, where the small-term approximations are not made. This improves the accuracy of the method at the expense of greater computation.

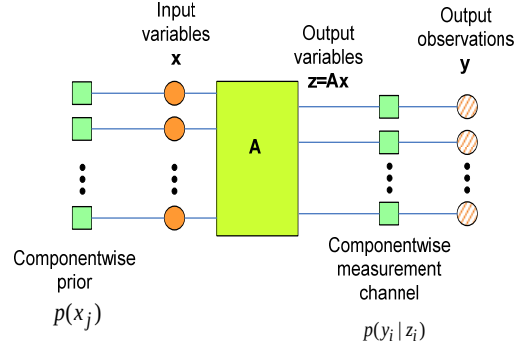


Fig. 2. An example of a simple graphical model for an estimation problem where $\mathbf{x}$ has independent components with priors $p(\mathbf{x}_j)$, $\mathbf{z} = \mathbf{A}\mathbf{x}$, and the observation vector $\mathbf{y}$ is the output of a componentwise measurement channel with transition function $p(\mathbf{y}_i | \mathbf{z}_i)$.

One final piece of notation: since $\mathbf{A}_{ij} \neq 0$ only when $j \in \beta(i)$, we may sometimes write the summation (3) as

$$\mathbf{z}_i = \sum_{j \in \beta(i)} \mathbf{A}_{ij}\mathbf{x}_j = \mathbf{A}_{i,\beta(i)}\mathbf{x}_{\beta(i)}, \quad (10)$$

where $\mathbf{x}_{\beta(i)}$ is the sub-vector of $\mathbf{x}$ with components $j \in \beta(i)$ and $\mathbf{A}_{i,\beta(i)}$ is the corresponding portion of the i th block-row of $\mathbf{A}$.

III. MOTIVATING EXAMPLES

We begin with a basic development to show that some previously-studied problems with a fully separable prior on $\mathbf{x}$ fit within our model. Then we show an extension to more complicated problems. A more extensive example is deferred to Section VI.

Linear Mixing and General Output Channel—Independent Variables: As a simple example of a graphical model with linear mixing, consider the following estimation problem: An unknown vector $\mathbf{x}$ has independent components $\mathbf{x}_j$, each with probability distribution $p(\mathbf{x}_j)$. The vector $\mathbf{x}$ is passed through a linear transform to yield an output $\mathbf{z} = \mathbf{A}\mathbf{x}$. Each component $\mathbf{z}_i$ of $\mathbf{z}$ then randomly generates an output component $\mathbf{y}_i$ with a conditional distribution $p(\mathbf{y}_i | \mathbf{z}_i)$. The problem is to estimate $\mathbf{x}$ given the observations $\mathbf{y}$ and transform matrix $\mathbf{A}$.

Under the assumption that the components $\mathbf{x}_j$ are independent, and the components $\mathbf{y}_i$ are conditionally independent given $\mathbf{z}$, the posterior distribution of $\mathbf{x}$ factors as

$$p(\mathbf{x} | \mathbf{y}) = \frac{1}{Z(\mathbf{y})} \prod_{i=1}^m p(\mathbf{y}_i | \mathbf{z}_i) \prod_{j=1}^n p(\mathbf{x}_j), \quad \mathbf{z} = \mathbf{A}\mathbf{x},$$

where $Z(\mathbf{y})$ is a normalization constant. If we now fix some observed $\mathbf{y}$, we can rewrite this posterior as

$$p(\mathbf{x} | \mathbf{y}) \propto \exp[F(\mathbf{x}, \mathbf{z})], \quad \mathbf{z} = \mathbf{A}\mathbf{x},$$

where $F(\mathbf{x}, \mathbf{z})$ is the log posterior,

$$F(\mathbf{x}, \mathbf{z}) = \sum_{i=1}^m \log p(\mathbf{y}_i | \mathbf{z}_i) + \sum_{j=1}^n \log p(\mathbf{x}_j),$$

and the dependence on $\mathbf{y}$ is implicit. The log posterior is therefore in the form of (2) with the scale factor $u = 1$ and

$m+n$ factors, $f_i(\cdot)$, $i = 1, \dots, m+n$. The first m factors can be used for the output terms

$$f_i(\mathbf{z}_i) = \log p(\mathbf{y}_i | \mathbf{z}_i), \quad i = 1, \dots, m,$$

which do not depend on any of the terms $\mathbf{x}_j$. That is, $\alpha(j) = \emptyset$ for each variable index j . The remaining n factors are for the inputs

$$f_{m+j}(\mathbf{x}_j) = \log p(\mathbf{x}_j), \quad j = 1, \dots, n.$$

For these factors, the strong edge set is the singleton $\alpha(m+j) = \{j\}$, and there is no linear term; we can think of $\mathbf{z}_{m+j}$ as zero-dimensional. The corresponding factor graph with the $m+n$ factors is shown in Fig. 2.

In the case when all the variables $\mathbf{x}_j$ and $\mathbf{z}_i$ are scalars, the estimation problem is precisely the set-up considered in [6], [18], as mentioned in the introduction. The special subcase of this problem when each output measurement y_i is z_i with additive white Gaussian noise (AWGN),

$$y_i = z_i + w_i, \quad w_i \sim \mathcal{N}(0, \sigma_w^2), \quad (11)$$

is considered in several references [3], [5], [8], [9], [19] for a variety of different distributions $p(x_j)$.

Linear Mixing and General Output Channel—Dependent Variables: The graphical model framework considered here is significantly more general. For example, consider the graphical model in Fig. 3. In this case, the components of the input vector are no longer necessarily independent, but instead described themselves by a graphical model. Some additional latent variables in the vector $\mathbf{u}$ may also be added. For example, [10] used a discrete Markov chain to model clustered sparsity, [11] used discrete-Markov and Gauss-Markov chains to model slow changes in support and amplitude across multiple measurement vectors, and [12] used a discrete Markov tree model to capture the persistence across scales in the wavelet coefficients of an image. In the example we present in Section VI, we will use the graphical model to represent joint sparsity. Similarly, the output need not involve a separable mapping, and the observations $\mathbf{y}$ can depend on the outputs $\mathbf{z}$ through a second graphical model, also with some latent variables $\mathbf{v}$ that can act as unknown parameters. For example, the output could be an unknown nonlinear function and the parameters $\mathbf{v}$ may be the parameters in the function. This technique was used in [13] to incorporate constraints on LDPC coded bits when performing turbo sparse-channel estimation, equalization, and decoding using GAMP.

IV. REVIEW OF LOOPY BELIEF PROPAGATION

Finding exact solutions to the problems P-OPT and P-EXP above is generally intractable for most factors $f_i(\cdot)$, as the solutions requires optimizations or expectations over all n variables $\mathbf{x}_j$. A widely-used approximate technique is loopy belief propagation [2], [20], which attempts to reduce the optimization and estimation problems to a sequence of lower-dimensional problems associated with each factor $f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i)$. We consider two common variants of loopy BP: the max-sum algorithm for the problem P-OPT and the sum-product algorithm for the problem P-EXP. This section will

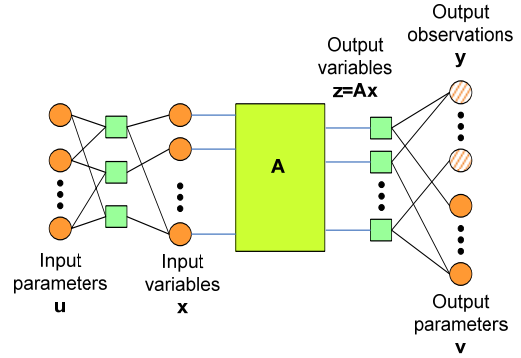


Fig. 3. A generalization of the model in Fig. 2, where the input variables $\mathbf{x}$ are themselves generated by a graphical model with latent variables $\mathbf{u}$. Similarly, the dependence of the observation vector $\mathbf{y}$ on the linear mixing output $\mathbf{z}$ is through a second graphical model.

briefly review these methods, as they will be the basis of the GAMP algorithms described in Section V.

The max-sum loopy BP algorithm is based on iteratively passing estimates of the marginal utilities $\Delta_j(\mathbf{x}_j)$ in (5) along the graph edges. Similarly, the sum-product loopy BP algorithm passes estimates of the log marginals $\Delta_j(\mathbf{x}_j)$ in (8). For either algorithm, we index the iterations by $t = 0, 1, \dots$, and denote the estimate “message” from the factor node f_i to the variable node $\mathbf{x}_j$ in the t th iteration by $\Delta_{i \rightarrow j}(t, \mathbf{x}_j)$ and the reverse message by $\Delta_{i \leftarrow j}(t, \mathbf{x}_j)$.

To describe the updates of the messages, we need to introduce some additional notation. First, the messages in loopy BP are equivalent up to a constant factor. That is, adding any constant term that does not depend on $\mathbf{x}_j$ to either the message $\Delta_{i \rightarrow j}(t, \mathbf{x}_j)$ or $\Delta_{i \leftarrow j}(t, \mathbf{x}_j)$ has no effect on the algorithm. We will thus use the notation

$$\Delta(\mathbf{x}) \equiv g(\mathbf{x}) \iff \Delta(\mathbf{x}) = g(\mathbf{x}) + C,$$

for some constant C that does not depend on $\mathbf{x}$. Similarly, we write $p(\mathbf{x}) \propto q(\mathbf{x})$ when $p(\mathbf{x}) = Cq(\mathbf{x})$ for some constant C . Finally, for the sum-product algorithm, we will fix the scale factor $u > 0$ in the problem P-EXP, and, for any function $\Delta(\cdot)$, we will write $\mathbb{E}[g(\mathbf{x}); \Delta(\cdot)]$ to denote the expectation of $g(\mathbf{x})$ with respect to a distribution specified indirectly by $\Delta(\cdot)$:

$$\mathbb{E}[g(\mathbf{x}); \Delta(\cdot)] = \int g(\mathbf{x}) p(\mathbf{x}) d\mathbf{x}, \quad (12)$$

where $p(\mathbf{x})$ is the probability distribution

$$p(\mathbf{x}) = \frac{1}{Z(u)} \exp[u\Delta(\mathbf{x})]$$

and $Z(u)$ is a normalization constant. Given these definitions, the updates for the messages in both the max-sum and sum-product loopy BP algorithms are as follows:

Algorithm 1: Loopy belief propagation: Consider the problems P-OPT or P-EXP above for some function $F(\mathbf{x}, \mathbf{z})$ of the form (2) and matrix $\mathbf{A}$. For the problem P-EXP, fix the scale factor $u > 0$. The **max-sum loopy BP** algorithm for the problem P-OPT and the **sum-product loopy BP** for the problem P-EXP follow the following steps:

- 1) *Initialization*: Set $t = 0$ and, for all $(i, j) \in E$, set $\Delta_{i \leftarrow j}(t, \mathbf{x}_j) = 0$.
- 2) *Factor node update*: For all edges $(i, j) \in E$, compute the function

$$H_{i \rightarrow j}(t, \mathbf{x}_{\partial(i)}, \mathbf{z}_i) := f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i) + \sum_{r \in \beta(i) \neq j} \Delta_{i \leftarrow r}(t, \mathbf{x}_r). \quad (13)$$

For **max-sum loopy BP** compute:

$$\Delta_{i \rightarrow j}(t, \mathbf{x}_j) \equiv \max_{\substack{\mathbf{x}_{\partial(i) \setminus j} \\ \mathbf{z}_i = \mathbf{A}_i \mathbf{x}}} H_{i \rightarrow j}(t, \mathbf{x}_{\partial(i)}, \mathbf{z}_i), \quad (14)$$

where and the maximization in (14) is over all variables $\mathbf{x}_r$ with $r \in \partial(i)$ and $r \neq j$, subject to the constraint $\mathbf{z}_i = \mathbf{A}_i \mathbf{x}$.

For **sum-product loopy BP** compute:

$$\Delta_{i \rightarrow j}(t, \mathbf{x}_j) \equiv \frac{1}{u} \log \int p_{i \rightarrow j}(t, \mathbf{x}_{\partial(i)}) d\mathbf{x}_{\partial(i) \setminus j}, \quad (15)$$

where the integration is over variables $\mathbf{x}_r$ with $r \in \partial(i)$ and $r \neq j$, and $p_{i \rightarrow j}(t, \mathbf{x}_{\partial(i)})$ is the probability distribution

$$p_{i \rightarrow j}(t, \mathbf{x}_{\partial(i)}) \propto \exp [u H_{i \rightarrow j}(t, \mathbf{x}_{\partial(i)}, \mathbf{z}_i)], \quad \mathbf{z}_i = \mathbf{A}_i \mathbf{x}. \quad (16)$$

- 3) *Variable node update*: For all $(i, j) \in E$:

$$\Delta_{i \leftarrow j}(t+1, \mathbf{x}_j) \equiv \sum_{\ell \in \partial(j) \neq i} \Delta_{\ell \rightarrow j}(t, \mathbf{x}_j). \quad (17)$$

Also, let

$$\Delta_j(t+1, \mathbf{x}_j) \equiv \sum_{i \in \partial(j)} \Delta_{i \rightarrow j}(t, \mathbf{x}_j). \quad (18)$$

For **max-sum loopy BP**, compute:

$$\hat{\mathbf{x}}_j(t+1) := \arg \max_{\mathbf{x}_j} \Delta_j(t+1, \mathbf{x}_j). \quad (19)$$

For **sum-product loopy BP**, compute:

$$\hat{\mathbf{x}}_j(t+1) := \mathbb{E}[\mathbf{x}_j; \Delta_j(t+1, \cdot)]. \quad (20)$$

Increment t and return to step 2 for some number of iterations.

When the graph G is acyclic, then it can be shown that the max-sum and sum-product loopy BP algorithms above converge, respectively, to the exact solutions to the problems P-OPT and P-EXP in Section II. However, for graphs with cycles, loopy BP algorithm is, in general, only approximate. A complete analysis of loopy BP algorithm is beyond the scope of this work and is covered extensively elsewhere. See, for example, [2], [20] and [21].

What is important here is the computational complexity of loopy BP. Brute force solutions to the problems P-OPT and P-EXP in Section II involve either a joint optimization or expectation over *all* n variables $\mathbf{x}_j$. The loopy BP algorithm in contrast reduces these “global” problems to a sequence of “local” problems associated with each of the factors $f_i(\cdot)$. The local optimization or expectation problems may be significantly lower in dimension than the global problem. Consider,

for example, the update in Step 2 at some factor node $f_i(\cdot)$ and let $d = |\partial(i)|$ be the number of neighbors of $f_i(\cdot)$. The factor $f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i)$ is thus a function of d variables $\mathbf{x}_j$, either through one of the $|\alpha(i)|$ strong edges or $|\beta(i)|$ weak edges. For each $j \in \partial(i)$, the optimization (14) for the max-sum algorithm thus involves an optimization over $d-1$ of the variables. Similarly, for the sum-product algorithm, the factor node update (15) involves an integration over $d-1$ variables. For certain classes of functions (such as the binary constraint functions in LDPC codes [22], [23], the optimization or expectation admits a simple solution. However, both optimization and expectations, in general, have complexities that grow exponentially in d . Thus, standard loopy BP is only typically tractable when the degrees d of the factor nodes are small or the factors have some particular form.

V. HYBRID-GAMP

The Hybrid-GAMP algorithm reduces the cost of loopy BP by exploiting complexity-reducing approximations of the cumulative effect of the weak edges. We saw in the previous section that the loopy BP update at each factor node $f_i(\cdot)$ has a cost that may be exponential in the degree d of the node, which consists of $|\alpha(i)|$ strong edges and $|\beta(i)|$ weak edges. The Hybrid-GAMP algorithm with edge partitioning uses the linear mixing property to eliminate the exponential dependence on the $|\beta(i)|$ weak edges, so the only exponential dependence is on the $|\alpha(i)|$ strong edges. Thus, the edge partitioning makes Hybrid-GAMP computationally tractable as long as the number of strong edges is small. There can be an arbitrary number of weak edges. In particular, the mixing matrix $\mathbf{A}$ can be dense.

The basis of the Hybrid-GAMP approximation is to assume that the matrix $\mathbf{A}_{ij}$ is small along any weak edge (i, j) . Under this assumption, in the max-sum algorithm one can apply a quadratic approximation of the messages along the weak edges and reduce the factor node update to a standard least-squares problem. Similarly, in the sum-product algorithm, one can apply a Gaussian approximation of the weak edges messages and use the Central Limit Theorem at the factor nodes.

A heuristic derivation of the Hybrid-GAMP approximations is given in Appendix A for the max-sum algorithm and Appendix B for the sum-product algorithm. We emphasize that these derivations are merely heuristic—we do not claim any formal matching between loopy BP and the Hybrid-GAMP approximation.

To state the Hybrid-GAMP algorithm, we need additional notation: The Hybrid-GAMP algorithm produces a sequence of estimates $\hat{\mathbf{x}}_j(t)$ and $\hat{\mathbf{z}}_i(t)$ for the variables $\mathbf{x}_j$ and $\mathbf{z}_i$. Several other intermediate variables $\hat{\mathbf{p}}_i(t)$, $\hat{\mathbf{s}}_i(t)$ and $\hat{\mathbf{r}}_j(t)$ are also produced. Associated with each of the variables are matrices $\mathbf{Q}_j^x(t)$, $\mathbf{Q}_i^z(t)$, $\dots$, that represent certain Hessians for the max-sum algorithm and covariances for the sum-product algorithm. When we need to take the inverse of the matrices, we will use the notation $\mathbf{Q}_j^{-x}(t)$ to mean $(\mathbf{Q}_j^x(t))^{-1}$. Also, $\mathbf{a}^*$ and $\mathbf{A}^*$ denote the transposes of vector $\mathbf{a}$ and matrix $\mathbf{A}$. Finally, for any positive definite matrix $\mathbf{Q}$ and vector $\mathbf{a}$, we will let $\|\mathbf{a}\|_{\mathbf{Q}}^2 = \mathbf{a}^* \mathbf{Q}^{-1} \mathbf{a}$, which is a weighted two norm.

Algorithm 2: Hybrid-GAMP: Consider the problems P-OPT or P-EXP above for some function $F(\mathbf{x}, \mathbf{z})$ of the form (2) and matrix $\mathbf{A}$. For the problem P-EXP, fix the scale factor $u > 0$. The **max-sum GAMP** algorithm for the problem P-OPT and the **sum-product GAMP** for the problem P-EXP follow the following steps:

- 1) *Initialization:* Set $t = 0$ and select some initial values $\Delta_{i \rightarrow j}(t-1, \mathbf{x}_j)$ for all strong edges (i, j) and values $\hat{\mathbf{r}}_j(t-1)$ and $\mathbf{Q}_j^r(t-1)$ for all variable node indices j .
- 2) *Variable node update, strong edges:* For all strong edges (i, j) , compute

$$\Delta_{i \leftarrow j}(t, \mathbf{x}_j) \equiv \sum_{\ell \in \alpha(j) \neq i} \Delta_{\ell \rightarrow j}(t-1, \mathbf{x}_j) - \frac{1}{2} \|\hat{\mathbf{r}}_j(t-1) - \mathbf{x}_j\|_{\mathbf{Q}_j^r(t-1)}^2. \quad (21)$$

- 3) *Variable node update, weak edges:* For all variable nodes j , compute

$$\Delta_j(t, \mathbf{x}_j) \equiv H_j^x(t, \mathbf{x}_j, \hat{\mathbf{r}}_j(t-1), \mathbf{Q}_j^r(t-1)) \quad (22)$$

and

$$H_j^x(t, \mathbf{x}_j, \hat{\mathbf{r}}_j, \mathbf{Q}_j^r) = \sum_{i \in \alpha(j)} \Delta_{i \rightarrow j}(t-1, \mathbf{x}_j) - \frac{1}{2} \|\hat{\mathbf{r}}_j - \mathbf{x}_j\|_{\mathbf{Q}_j^r}^2. \quad (23)$$

For **max-sum GAMP**:

$$\hat{\mathbf{x}}_j(t) = \arg \max_{\mathbf{x}_j} \Delta_j(t, \mathbf{x}_j), \quad (24a)$$

$$\mathbf{Q}_j^{-x}(t) = -\frac{\partial^2}{\partial \mathbf{x}^2} \Delta_j(t, \mathbf{x}_j). \quad (24b)$$

For **sum-product GAMP**:

$$\hat{\mathbf{x}}_j(t) = \mathbb{E}(\mathbf{x}_j; \Delta_j(t, \cdot)), \quad (25a)$$

$$\mathbf{Q}_j^x(t) = u \mathbf{var}(\mathbf{x}_j; \Delta_j(t, \cdot)). \quad (25b)$$

- 4) *Factor node update, linear step:* For all factor nodes i , compute

$$\hat{\mathbf{z}}_i(t) = \sum_{j \in \beta(i)} \mathbf{A}_{ij} \hat{\mathbf{x}}_j(t), \quad (26a)$$

$$\hat{\mathbf{p}}_i(t) = \hat{\mathbf{z}}_i(t) - \mathbf{Q}_i^p(t) \hat{\mathbf{s}}_i(t-1), \quad (26b)$$

$$\mathbf{Q}_i^p(t) = \sum_{j \in \beta(i)} \mathbf{A}_{ij} \mathbf{Q}_j^x(t) \mathbf{A}_{ij}^*, \quad (26c)$$

where, initially, we set $\hat{\mathbf{s}}_i(-1) = 0$.

- 5) *Factor node update, strong edges:* For all strong edges (i, j) , compute:

$$H_{i \rightarrow j}^z(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i, \hat{\mathbf{p}}_i, \mathbf{Q}_i^p) := f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i) + \sum_{r \in \alpha(i) \neq j} \Delta_{i \leftarrow r}(t, \mathbf{x}_r) - \frac{1}{2} \|\mathbf{z}_i - \hat{\mathbf{p}}_i\|_{\mathbf{Q}_i^p}^2. \quad (27)$$

Then, for **max-sum GAMP** compute:

$$\Delta_{i \rightarrow j}(t, \mathbf{x}_j) = \max_{\mathbf{x}_{\alpha(i) \setminus j}, \mathbf{z}_i} H_{i \rightarrow j}^z(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i, \hat{\mathbf{p}}_i(t), \mathbf{Q}_i^p(t)), \quad (28)$$

where the maximization is over $\mathbf{z}_i$ and all components $\mathbf{x}_r$ with $r \in \alpha(i) \setminus j$.

For **sum-product GAMP** compute:

$$\Delta_{i \rightarrow j}(t, \mathbf{x}_j) \equiv \frac{1}{u} \log \int p_{i \rightarrow j}(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i) d\mathbf{x}_{\alpha(i) \setminus j} d\mathbf{z}_i \quad (29)$$

where the integral is over $\mathbf{z}_i$ and all components $\mathbf{x}_r$ with $r \in \alpha(i) \setminus j$, and $p_{i \rightarrow j}(0, \mathbf{x}_j)$ is the probability distribution function

$$p_{i \rightarrow j}(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i) \propto \exp(u H_{i \rightarrow j}^z(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i, \hat{\mathbf{p}}_i(t), \mathbf{Q}_i^p(t))). \quad (30)$$

- 6) *Factor node update, weak edges:* For all factor nodes i , compute

$$H_i^z(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i, \hat{\mathbf{p}}_i, \mathbf{Q}_i^p) := f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i) + \sum_{r \in \alpha(i)} \Delta_{i \leftarrow r}(t, \mathbf{x}_r) - \frac{1}{2} \|\mathbf{z}_i - \hat{\mathbf{p}}_i\|_{\mathbf{Q}_i^p}^2. \quad (31a)$$

Then, for **max-sum GAMP** compute:

$$(\hat{\mathbf{x}}_{\alpha(i)}^0(t), \hat{\mathbf{z}}_i^0(t)) := \arg \max_{\mathbf{x}, \mathbf{z}_i} H_i^z(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i, \hat{\mathbf{p}}_i(t), \mathbf{Q}_i^p(t)), \quad (31b)$$

$$\mathbf{D}_i^z(t) := -\frac{\partial^2}{\partial \mathbf{z}_i^2} H_i^z(t, \hat{\mathbf{x}}_{\alpha(i)}^0, \hat{\mathbf{z}}_i^0, \hat{\mathbf{p}}_i(t), \mathbf{Q}_i^p(t)), \quad (31c)$$

where the maximization in (31b) is over the sub-vector $\mathbf{x}_{\alpha(i)}$ and output vector $\mathbf{z}_i$.

For **sum-product GAMP**, let

$$\hat{\mathbf{z}}_i^0(t) = \mathbb{E}(\mathbf{z}_i), \quad \mathbf{Q}_i^z(t) = u \mathbf{var}(\mathbf{z}_i), \quad (32)$$

where $\mathbf{z}_i$ is the component of the pair $(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i)$ with the joint distribution

$$p_i(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i) \propto \exp(u H_i^z(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i, \hat{\mathbf{p}}_i(t), \mathbf{Q}_i^p(t))). \quad (33)$$

Then, for either max-sum or sum-product compute

$$\hat{\mathbf{s}}_i(t) = \mathbf{Q}_i^{-p}(t) [\hat{\mathbf{z}}_i^0(t) - \hat{\mathbf{p}}_i(t)], \quad (34a)$$

$$\mathbf{Q}_i^s(t) = \mathbf{Q}_i^{-p}(t) - \mathbf{Q}_i^{-p}(t) \mathbf{D}_i^{-z}(t) \mathbf{Q}_i^{-p}(t). \quad (34b)$$

- 7) *Variable node update, linear step:* For all variable nodes j compute

$$\mathbf{Q}_j^{-r}(t) = \sum_{i \in \beta(j)} \mathbf{A}_{ij}^* \mathbf{Q}_i^s(t) \mathbf{A}_{ij}, \quad (35a)$$

$$\hat{\mathbf{r}}_j(t) = \hat{\mathbf{x}}(t) + \mathbf{Q}_j^r(t) \sum_{i \in \beta(j)} \mathbf{A}_{ij}^* \hat{\mathbf{s}}_i(t). \quad (35b)$$

Increment t and return to step 2 for some number of iterations.

Although the Hybrid-GAMP algorithm above appears much more complicated than standard loopy BP (Algorithm 1), Hybrid-GAMP can be computationally dramatically cheaper. Recall that the main computational difficulty of loopy BP is Step 2, the factor update. The updates (14) and (15) involve an optimization or expectation over $|\partial(i)|$ variables, where $\partial(i)$ is the set of all variables connected to the factor node i . In the Hybrid-GAMP algorithm, these computations are replaced by (28) and (29), where the optimization and expectation need

only be computed over the strong edge variables $\alpha(i)$. If the number of edges is large, the computational savings can be dramatic. The other steps of the Hybrid-GAMP algorithms are all linear, simple least-square operations, or componentwise nonlinear functions on the individual variables.

A. Variants

For illustration, we have only presented one form of the Hybrid-GAMP procedure. Several variants are possible:

- *Discrete distributions*: The above description assumed continuous valued random variables x_j . The procedures can be easily modified for discrete-valued variables by appropriately replacing integrals with summations.
- *Message scheduling*: The above description also only considered a completely parallel implementation where each iteration performs exactly one update on all edges. Other so-called message schedules are also possible and may offer more efficient implementations or better convergence depending on the application [24], [25].

VI. APPLICATION TO STRUCTURED SPARSITY

A. Hybrid-GAMP Algorithm

To illustrate the Hybrid-GAMP method, we consider the group sparse estimation problem [26], [27]. Although this problem does not utilize the full generality of the Hybrid-GAMP framework, it provides a simple example of the Hybrid-GAMP method and has a number of existing algorithms that can be compared against.

A general version of the group sparsity problem that falls within the Hybrid-GAMP framework can be described as follows: Let $\mathbf{x}$ be an n -dimensional vector with scalar components x_j , $j = 1, \dots, n$. Vector-valued components can also be considered, but we restrict our attention to scalar components for simplicity. The component indices j of the vector $\mathbf{x}$ are divided into K (possibly overlapping) groups, $G_1, \dots, G_K \subseteq \{1, \dots, n\}$. We let $\gamma(j)$ be the set of group indices k such that $j \in G_k$. That is, the $\gamma(j)$ is the set of groups for which the component x_j belongs to.

Suppose that each group G_k can be “active” or “inactive”, and each component x_j can be non-zero only when at least one group G_k is active for some $k \in \gamma(j)$. Qualitatively, a vector $\mathbf{x}$ is sparse with respect to this group structure if it is consistent with only a small number of groups being active. That is, most of the components of $\mathbf{x}$ are zero with the non-zero components having support contained in a union of a small number of groups. The group sparse estimation problem is to estimate the vector $\mathbf{x}$ from some measurements $\mathbf{y}$. The traditional (non-group) sparse estimation problem corresponds to the special case when there n groups of singletons $G_j = \{j\}$.

Particularly with overlapping groups, there are a number of ways to model the group sparse structure in a Bayesian manner. For illustration, we consider the following simple model: For each group G_k , let $\xi_k \in \{0, 1\}$ be a Boolean variable with $\xi_k = 1$ when the group G_k is active and $\xi_k = 0$ when it is inactive. We call ξ_k activity indicators and model them as i.i.d. with

$$P(\xi_k = 1) = 1 - P(\xi_k = 0) = \rho \quad (36)$$

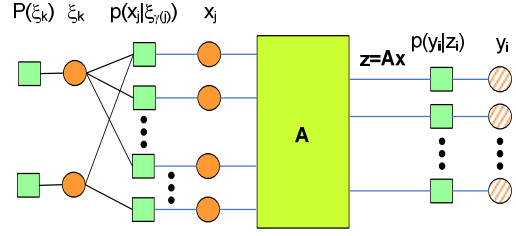


Fig. 4. Graphical model for the group sparsity problem with overlapping groups. The group dependencies between components of the vector $\mathbf{x}$ are modeled via a set of binary latent variables ξ .

for some sparsity level $\rho \in (0, 1)$. We assume that given the vector ξ , the components of $\mathbf{x}$ are independent with the conditional distributions

$$x_j \sim \begin{cases} 0 & \text{if } \xi_k = 0 \text{ for all } k \in \gamma(j) \\ V & \text{otherwise,} \end{cases} \quad (37)$$

where V is a random variable having the distribution of the component x_j in the event that it belongs to an active group. Finally, suppose that measurement vector $\mathbf{y}$ is generated by first passing $\mathbf{x}$ through a linear transform $\mathbf{z} = \mathbf{A}\mathbf{x}$, and then a separable componentwise measurement channel with probability distribution functions $p(y_i|z_i)$. Many other dependencies on the activities of $\mathbf{x}$ and measurement models $\mathbf{y}$ are possible – we use this simple model for illustration.

Under this model, the prior $\mathbf{x}$ and the measurements $\mathbf{y}$ are naturally described by a graphical model with linear mixing. Due to the independence assumptions, the posterior distribution of $\mathbf{x}$ given $\mathbf{y}$ factors as

$$p(\mathbf{x}|\mathbf{y}) = \frac{1}{Z(\mathbf{y})} \prod_{i=1}^m p(y_i|z_i) \prod_{j=1}^n P(x_j|\xi_{\gamma(j)}) \prod_{k=1}^K P(\xi_k), \quad (38)$$

where $P(x_j|\xi_{\gamma(j)})$ is the conditional distribution for the random variable in (37). The factor graph corresponding to this distribution is shown in Fig. 4.

Under this graphical model, Appendix C shows that the sum-product version of Hybrid-GAMP algorithm in Algorithm 2 reduces to the simple procedure in Algorithm 3. A similar max-sum algorithm could also be derived. In lines 8 and 9, we have used the notation $\mathbb{E}(X|R; Q^r, \hat{\rho})$ and $\text{var}(X|R; Q^r, \hat{\rho})$ to denote the expectation and variance of the scalar variable X with distribution

$$X \sim \begin{cases} 0 & \text{with probability } 1 - \hat{\rho} \\ V & \text{with probability } \hat{\rho}; \end{cases} \quad (39)$$

and R is an AWGN corrupted version of X

$$R = X + W, \quad W \sim \mathcal{N}(0, Q^r). \quad (40)$$

The algorithm can be interpreted as the GAMP procedure in [18] run in a parallel with updates the sparsity levels. Specifically, each iteration t of the main repeat-until loop has two stages. The first half of the iteration, labeled as the “basic GAMP update”, is identical to the standard updates from the basic GAMP algorithm [18], treating the components x_j as independent with sparsity level $\hat{\rho}_j(t)$. The second half of the iteration, labeled as the “sparsity update”, updates the sparsity

Algorithm 3 Sum-product Hybrid-GAMP for group sparsity

```

1: {Initialization}
2:  $t \leftarrow 0$ 
3:  $Q_j^r(t-1) \leftarrow \infty$ 
4:  $\text{LLR}_{j \leftarrow k}(t-1) \leftarrow \log(\rho/(1-\rho))$ 
5:  $\hat{\rho}_j(t) \leftarrow 1 - \prod_{k \in \gamma(j)} 1/(1 + \exp \text{LLR}_{j \leftarrow k}(t-1))$ 
6: repeat

7:   {Basic GAMP update}
8:    $\hat{x}_j(t) \leftarrow \mathbb{E}(X|R = \hat{r}_j(t-1); Q_j^r(t-1), \hat{\rho}_j(t))$ 
9:    $Q_j^x(t) \leftarrow \text{var}(X|R = \hat{r}_j(t-1); Q_j^r(t-1), \hat{\rho}_j(t))$ 
10:   $\hat{z}_i(t) \leftarrow \sum_j A_{ij} \hat{x}_j(t)$ 
11:   $Q_i^p(t) \leftarrow \sum_j |A_{ij}|^2 Q_j^x(t)$ 
12:   $\hat{p}_i(t) \leftarrow \hat{z}_i(t) - Q_i^p(t) \hat{s}_i(t-1)$ 
13:   $\hat{z}_i^0(t) \leftarrow \mathbb{E}(z_i | \hat{p}_i(t), Q_i^p(t))$ 
14:   $Q_i^z(t) \leftarrow \text{var}(z_i | \hat{p}_i(t), Q_i^p(t))$ 
15:   $\hat{s}_i(t) \leftarrow (\hat{z}_i^0(t) - \hat{p}_i(t)) / Q_i^p(t)$ 
16:   $Q_i^s(t) \leftarrow Q_i^p(t)(1 - Q_i^z(t)/Q_i^p(t))$ 
17:   $Q_j^{-r}(t) \leftarrow \sum_i |A_{ij}|^2 Q_i^s(t)$ 
18:   $\hat{r}_j(t) \leftarrow \hat{x}_j(t) + Q_j^r(t) \sum_i A_{ij}^* \hat{s}_i(t)$ 

19:   {Sparsity level update}
20:    $\hat{\rho}_{j \rightarrow k}(t) \leftarrow 1 - \prod_{i \in \gamma(j) \neq k} 1/(1 + \exp \text{LLR}_{i \leftarrow k}(t-1))$ 
21:   Compute  $\text{LLR}_{j \rightarrow k}(t)$  from (41)
22:    $\text{LLR}_{j \leftarrow k}(t) \leftarrow \log(\rho/(1-\rho)) + \sum_{i \in G_k \neq j} \text{LLR}_{i \rightarrow k}(t)$ 
23:    $\hat{\rho}_j(t+1) \leftarrow 1 - \prod_{k \in \gamma(j)} 1/(1 + \exp \text{LLR}_{j \leftarrow k}(t))$ 
24:    $t \leftarrow t+1$ 
25: until Terminate

```

levels $\hat{\rho}_j(t)$ based on the estimates from basic GAMP half of the iteration.

The sparsity update half of the iteration in Algorithm 3 also has a simple interpretation. The quantities $\hat{\rho}_j(t)$ and $\hat{\rho}_{j \rightarrow k}(t)$ can be interpreted, respectively, as estimates for the probabilities

$$\begin{aligned} \rho_j &= \Pr(\xi_k = 1 \text{ for some } k \in \gamma(j) | \mathbf{y}) \\ \rho_{j \rightarrow k} &= \Pr(\xi_i = 1 \text{ for some } i \in \gamma(j) \neq k | \mathbf{y}). \end{aligned}$$

That is, $\hat{\rho}_j(t)$ is an estimate for the probability that the component x_j belongs to at least one active group and $\hat{\rho}_{j \rightarrow k}(t)$ is the estimate for the probability that it belongs to an active group other than G_k . Similarly, the quantities $\text{LLR}_{j \rightarrow k}(t)$ and $\text{LLR}_{j \leftarrow k}(t)$ are estimates for the log likelihood ratios

$$\text{LLR}_k = \log \frac{P(\xi_k = 1 | \mathbf{y})}{P(\xi_k = 0 | \mathbf{y})}.$$

Most of the updates in the sparsity update half of the iteration are the natural conversions from the LLR values to estimates for ρ_j and $\rho_{j \rightarrow k}$. In line 21, the LLR message is computed by

$$\text{LLR}_{j \rightarrow k}(t) = \log \left(\frac{p_R(\hat{r}_j(t); Q_j^r(t), \hat{\rho} = 1)}{p_R(\hat{r}_j(t); Q_j^r(t), \hat{\rho} = \hat{\rho}_{j \rightarrow k}(t))} \right), \quad (41)$$

where $p_R(r; Q^r, \hat{\rho})$ is the probability distribution for the scalar random variable R in (40) where X has the distribution (39). The message (41) is the ratio of the likelihood of the output $\hat{r}$ given that x_j definitely belongs to an active group to the

likelihood given that x_j belongs to an active group other than the group G_k .

In this way, the Hybrid-GAMP procedure provides an intuitive and simple method for extending the basic GAMP algorithm of [18] for structured sparsity.

The Hybrid-GAMP algorithm for group sparsity is also extremely general. The algorithm can apply to arbitrary priors and output channels. In particular, the algorithm can incorporate logistic outputs that are often used for group sparse classification problems [28]–[30]. Also, the method can handle arbitrary, even non-overlapping, groups. In contrast, the extensions of other iterative algorithms to the case of non-overlapping groups sometimes requires approximations. See, for example, [31]. In fact, the methodology is quite general and likely be applied to general structured sparsity, including possibly the graphical model based sparse structures in image processing considered in [32].

B. Computational Complexity

In addition to its generality, the Hybrid-GAMP procedure is among the most computationally efficient. To illustrate this point, consider the special case when there are K non-overlapping groups of d elements each. In this case, the total vector dimension for $\mathbf{x}$ is $n = Kd$. We consider the non-overlapping case since there are many algorithms that apply to this case that we can compare against. For non-overlapping uniform groups, Table I compares the computational cost of the Hybrid-GAMP algorithm to other methods.

The dominant computation in each iteration of the Hybrid-GAMP algorithm, Algorithm 3, is simply the matrix multiplications by A and A^* and their componentwise squares of A and A^* . These operations all have total cost $O(mn) = O(mKd)$. Note that these multiplications could be cheaper if the matrix has any particular structure (e.g. sparse, Fourier, etc). The other per iteration computations are the m scalar estimates at the output (lines 13 and 14); the n scalar estimates at the input (lines 8 and 9) and the updates of the LLRs. All these computations are less than $O(mn)$ for the matrix multiply.

For the case of non-overlapping groups, the Hybrid-GAMP algorithm could also be implemented using vector-valued components. Specifically, the vector $\mathbf{x}$ can be regarded as a block vector with K vector components, each of dimension d . The general Hybrid-GAMP algorithm, Algorithm 2, can be applied on the vector-valued components. To contrast this with Algorithm 3, we will call Algorithm 3 Hybrid-GAMP with scalar components, and call the vector-valued case Hybrid-GAMP with vector components.

The cost is slightly higher for Hybrid-GAMP with vector components. In this case, there are no non-trivial strong edges since the block components are independent. However, in the update (26c), each $\mathbf{A}_{ij}$ is $1 \times d$ and $\mathbf{Q}_j^x(t)$ is $d \times d$. Thus, the computation (26c) requires mK computations of d^2 cost each for a total cost of $O(mKd^2) = O(mnd)$, which is the dominant cost. Of course, there may be a benefit in performance for Hybrid-GAMP with vector components, since it maintains the complete correlation matrix of all the

Method	Complexity
Group-OMP [34]	$O(\rho mn^2)$
Group-Lasso [26], [27], [35]	$O(mn)$ per iteration
Relaxed BP with vector components [33]	$O(mn^2)$ per iteration
Hybrid-GAMP with vector components	$O(mnd)$ per iteration
Hybrid-GAMP with scalar components	$O(mn)$ per iteration

TABLE I

COMPLEXITY COMPARISON FOR DIFFERENT ALGORITHMS FOR GROUP SPARSITY ESTIMATION OF A SPARSE VECTOR WITH K GROUPS, EACH GROUP OF DIMENSION d . THE NUMBER OF MEASUREMENTS IS m AND THE SPARSITY RATIO IS ρ .

components in each group. We do not investigate this possible performance benefit in this paper.

Also shown in Table I is the cost of a relaxed BP method of [33], which also uses approximate message passing similar to Hybrid-GAMP with vector components. That method, however, performs the same computations as Hybrid-GAMP on each of the mK graph edges as opposed to the $m + K$ graph vertices. It can be verified that the resulting cost has an $O(mK^2d^2) = O(mn^2)$ term.

The cost is slightly higher for GAMP with vector components. In this case, there are no non-trivial strong edges since the block components are independent. However, in the update (26c), each $\mathbf{A}_{ij}$ is $1 \times d$ and $\mathbf{Q}_j^x(t)$ is $d \times d$. Thus, the computation (26c) requires mn computations of d^2 cost each for a total cost of $O(mnd^2)$, which is the dominant cost.

These message passing algorithms can be compared against widely-used group LASSO methods [26], [27] which estimate $\mathbf{x}$ by solving some variant of a regularized least-squares problem of the form

$$\hat{\mathbf{x}} := \arg \min_{\mathbf{x}} \frac{1}{2} \|\mathbf{y} - \mathbf{A}\mathbf{x}\|^2 + \gamma \sum_{j=1}^n \|\mathbf{x}_j\|_2, \quad (42)$$

for some regularization parameter $\gamma > 0$. The problem (42) is convex and can be solved via a number of methods including [35]–[37], the fastest of which is the SpaRSA algorithm of [35]. Interestingly, this algorithm is similar to the GAMP method in that the algorithm is an iterative procedure, where in each iteration there is a linear update followed by a componentwise scalar minimization. Like the GAMP method, the bulk of the cost is the $O(mn)$ operations per iteration for the linear transform. An alternative approach for group sparse estimation is group orthogonal matching pursuit (Group-OMP) of [30], [34], a greedy algorithm that detects one group at a time. Each round of detection requires K correlations of cost md^2 . If there are on average ρK nonzero groups, the total complexity will be $O(\rho K^2md^2) = O(\rho mn^2)$. From the complexity estimates summarized in Table I it can be seen that GAMP, despite its generality, is computationally as simple (per iteration) as some of the most efficient algorithms specifically designed for the group sparsity problem.

Of course, a complete comparison requires that we consider the number of iterations, not just the computation per iteration. This comparison requires further study beyond the scope of this paper. However, it is possible that the Hybrid-GAMP procedure will be favorable in this regard. Our simulations

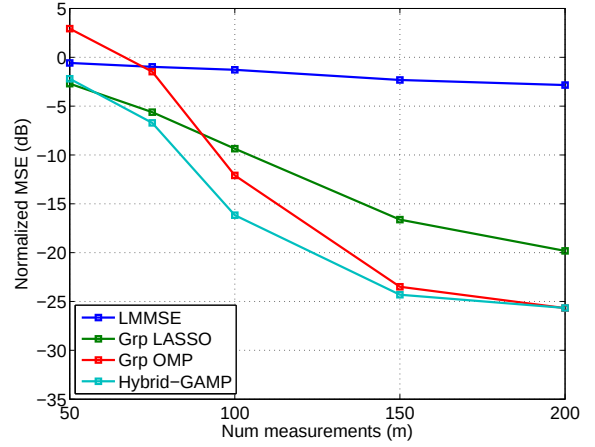


Fig. 5. Comparison of performances of various estimation algorithms for group sparsity with $n = 100$ groups of dimension $d = 4$ with a sparsity fraction of $\rho = 0.1$.

below show good convergence after only 10–20 iterations. Moreover, in the case of independent (i.e. non-group) sparsity, the number of iterations for AMP algorithms is typically small and often much less than other iterative methods. For examples, the paper [16] shows excellent convergence in 10–20 iterations which is dramatically faster than iterative soft thresholding method of [38].

C. Numerical Simulation

Fig. 5 shows a simple simulation comparison of the mean squared error (MSE) of the Hybrid-GAMP method (Algorithm 3) along with group OMP, group LASSO and a simple linear minimum MSE estimator. The simulation used a vector $\mathbf{x}$ with $n = 100$ groups of size $d = 4$ and sparsity fraction of $\rho = 0.1$. The matrix was i.i.d. Gaussian and the observations were with AWGN noise at an SNR of 20 dB. The number of measurements m was varied from 50 to 200, and the plot shows the MSE for each of the methods. The Hybrid-GAMP method was run with 20 iterations. In group LASSO, at each value of m , the algorithm was simulated with several values of the regularization parameter γ in (42) and the plot shows the minimum MSE. In Group-OMP, the algorithm was run with the true value of the number of nonzero coefficients. It can be seen that the GAMP method is consistently as good or better than both other methods. All code for the simulations can be found in the SourceForge open website [39].

We conclude that, even in the special case of group sparsity with AWGN measurements, the GAMP method is at least comparable in performance and computational complexity to the most competitive algorithms. On top of this, GAMP offers a much more general framework that can include more rich modeling in both the output and input.

VII. CONCLUSIONS

A general model for optimization and statistical inference based on graphical models with linear mixing was presented. The linear mixing components of the graphical model account for interactions through aggregates of large numbers of small,

linearizable perturbations. Gaussian and second-order approximations are shown to greatly simplify the implementation of loopy BP for these interactions, and the Hybrid-GAMP framework presented here enables these approximations to be incorporated in a systematic manner in general graphical models. Simulations were presented for group sparsity where the Hybrid-GAMP method has equal or superior performance to existing methods. However, the generality of the method will enable GAMP to be applied to much more complex models where few algorithms are available. In addition to experimenting with such models, future work will focus on establishing rigorous theoretical analyses along the lines of [9], [18].

APPENDIX A

HEURISTIC DERIVATION OF MAX-SUM HYBRID-GAMP

A. Preliminary Lemma

Before deriving the Hybrid-GAMP approximation for the max-sum algorithm, we need the following result. Let $H(\mathbf{w}, \mathbf{v})$ be a real-valued function of vectors $\mathbf{w}$ and $\mathbf{v}$ of the form

$$H(\mathbf{w}, \mathbf{v}) = H_0(\mathbf{w}) - \frac{1}{2} \|\mathbf{w} - \mathbf{v}\|_{\mathbf{Q}^v}^2 \quad (43)$$

for some positive definite matrix $\mathbf{Q}^v$. For each $\mathbf{v}$, let

$$\hat{\mathbf{w}}(\mathbf{v}) := \arg \max_{\mathbf{w}} H(\mathbf{w}, \mathbf{v}), \quad (44a)$$

$$G(\mathbf{v}) := H(\hat{\mathbf{w}}(\mathbf{v}), \mathbf{v}) = \max_{\mathbf{w}} H(\mathbf{w}, \mathbf{v}). \quad (44b)$$

Lemma 1: Assume the maximization in (44) exists and is unique and twice differentiable. Then,

$$\frac{\partial}{\partial \mathbf{v}} G(\mathbf{v}) = \mathbf{Q}^{-v} (\hat{\mathbf{w}}(\mathbf{v}) - \mathbf{v}), \quad (45a)$$

$$\frac{\partial \hat{\mathbf{w}}}{\partial \mathbf{v}} = -\mathbf{D}^{-1} \mathbf{Q}^{-v}, \quad (45b)$$

$$\frac{\partial^2}{\partial \mathbf{v}^2} G(\mathbf{v}) = -\mathbf{Q}^{-v} - \mathbf{Q}^{-v} \mathbf{D}^{-1} \mathbf{Q}^{-v}, \quad (45c)$$

where

$$\mathbf{D} = \left. \frac{\partial^2 H(\mathbf{w}, \mathbf{v})}{\partial \mathbf{w}^2} \right|_{\mathbf{w}=\hat{\mathbf{w}}(\mathbf{v})}.$$

Proof: Since $\mathbf{w} = \hat{\mathbf{w}}(\mathbf{v})$ is a maximizer of $H(\mathbf{w}, \mathbf{v})$,

$$\frac{\partial H(\hat{\mathbf{w}}(\mathbf{v}), \mathbf{v})}{\partial \mathbf{w}} = 0. \quad (46)$$

Therefore, (45a) follows from

$$\begin{aligned} \frac{\partial G(\mathbf{v})}{\partial \mathbf{v}} &= \frac{\partial H(\hat{\mathbf{w}}(\mathbf{v}), \mathbf{v})}{\partial \mathbf{w} \frac{\partial \hat{\mathbf{w}}(\mathbf{v})}{\partial \mathbf{v}} + \frac{\partial H(\hat{\mathbf{w}}(\mathbf{v}), \mathbf{v})}{\partial \mathbf{v}}} \\ &= \frac{\partial H(\hat{\mathbf{w}}(\mathbf{v}), \mathbf{v})}{\partial \mathbf{v}} = \mathbf{Q}^{-v} (\hat{\mathbf{w}}(\mathbf{v}) - \mathbf{v}), \end{aligned}$$

where the last step is a result of the form of $H(\cdot)$ in (43). The form of $H(\cdot)$ in (43) also shows that for all $\mathbf{w}$ and $\mathbf{v}$

$$\frac{\partial^2 H(\mathbf{w}, \mathbf{v})}{\partial \mathbf{w} \partial \mathbf{v}} = \mathbf{Q}^{-v}.$$

Taking the derivative of (46),

$$\frac{\partial^2 H(\hat{\mathbf{w}}, \mathbf{v})}{\partial \mathbf{w} \partial \mathbf{v}} + \frac{\partial^2 H(\hat{\mathbf{w}}, \mathbf{v})}{\partial \mathbf{w}^2} \frac{\partial \hat{\mathbf{w}}(\mathbf{v})}{\partial \mathbf{v}} = 0,$$

which implies that

$$\frac{\partial \hat{\mathbf{w}}(\mathbf{v})}{\partial \mathbf{v}} = -\mathbf{D}^{-1} \mathbf{Q}^{-v},$$

which proves (45b). Finally, taking the second derivative of (45a) along with (45b) shows (45c). ■

B. Hybrid-GAMP Approximation for Max-Sum

First consider the factor node update (14) and partition the objective function $H_{i \rightarrow j}(\cdot)$ in (13) as

$$\begin{aligned} H_{i \rightarrow j}(t, \mathbf{x}_{\partial(i)}, \mathbf{z}_i) \\ = H_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i) + H_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_{\beta(i)}), \end{aligned} \quad (47)$$

where

$$\begin{aligned} H_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i) \\ := f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i) + \sum_{r \in \alpha(i) \neq j} \Delta_{i \leftarrow r}(t, \mathbf{x}_r), \end{aligned} \quad (48a)$$

$$H_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_{\beta(i)}) := \sum_{r \in \beta(i) \neq j} \Delta_{i \leftarrow r}(t, \mathbf{x}_r). \quad (48b)$$

That is, we have separated the terms in the objective function $H_{i \rightarrow j}(\cdot)$ between the strong and weak edges. We can also partition the maximization (14) as

$$\begin{aligned} \Delta_{i \rightarrow j}(t, \mathbf{x}_j) \\ = \max_{\mathbf{z}_i} [\Delta_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_j, \mathbf{z}_i) + \Delta_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i)], \end{aligned} \quad (49)$$

where

$$\Delta_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_j, \mathbf{z}_i) := \max_{\mathbf{x}_{\alpha(i) \setminus j}} H_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i), \quad (50a)$$

$$\Delta_{i \rightarrow j}^{\text{weak}}(t, \mathbf{z}_i, \mathbf{x}_j) := \max_{\substack{\mathbf{x}_{\beta(i) \setminus j} \\ \mathbf{z}_i = \mathbf{A}_i \mathbf{x}}} H_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_{\beta(i)}), \quad (50b)$$

with the maximization in (50a) being over all $\mathbf{x}_r$ with $r \in \alpha(i) \setminus j$; and the maximization in (50b) over all $\mathbf{x}_r$ with $r \in \beta(i) \setminus j$ subject to $\mathbf{z}_i = \mathbf{A}_i \mathbf{x}$. The partitioning (49) is valid since the strong and weak edges are distinct. This insures that for all $r \in \delta(i)$, either $r \in \alpha(i)$ or $r \in \beta(i)$, but not both.

The Hybrid-GAMP approximation applies to the weak term (50b). For any j and all weak edges (i, j) , define:

$$\hat{\mathbf{x}}_j(t) := \arg \max_{\mathbf{x}_j} \Delta_j(t, \mathbf{x}_j), \quad (51a)$$

$$\hat{\mathbf{x}}_{i \leftarrow j}(t) := \arg \max_{\mathbf{x}_j} \Delta_{i \leftarrow j}(t, \mathbf{x}_j), \quad (51b)$$

$$\mathbf{Q}_j^{-x}(t) := -\frac{\partial^2}{\partial \mathbf{x}_j^2} \Delta_j(t, \mathbf{x}_j) \big|_{\mathbf{x}_j = \hat{\mathbf{x}}_j(t)}, \quad (51c)$$

$$\mathbf{Q}_{i \leftarrow j}^{-x}(t) := -\frac{\partial^2}{\partial \mathbf{x}_j^2} \Delta_{i \leftarrow j}(t, \mathbf{x}_j) \big|_{\mathbf{x}_j = \hat{\mathbf{x}}_{i \leftarrow j}(t)}, \quad (51d)$$

which are the maximum and Hessian of the incoming weak messages. Since the assumption of the Hybrid-GAMP algorithm is that $\mathbf{A}_{ir}$ is small for all weak edges (i, r) , the values of $\mathbf{x}_r$ in the maximization (50b) will be close to $\hat{\mathbf{x}}_{i \leftarrow r}(t)$. So, for all weak edges, (i, r) , we can approximate each term $\Delta_{i \leftarrow r}(t, \mathbf{x}_r)$ in (48b) with the second-order approximation

$$\begin{aligned} \Delta_{i \leftarrow r}(t, \mathbf{x}_r) \\ \approx \Delta_{i \leftarrow r}(t, \hat{\mathbf{x}}_{i \leftarrow r}(t)) - \frac{1}{2} \|\mathbf{x}_r - \hat{\mathbf{x}}_{i \leftarrow r}(t)\|_{\mathbf{Q}_j^x(t)}^2, \end{aligned} \quad (52)$$

where we have additionally made the approximation $\mathbf{Q}_{i \leftarrow r}^x(t) \approx \mathbf{Q}_r^x(t)$ for all i . Substituting (52) into (48b), the maximization (50b) reduces to

$$\Delta_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i) \approx \text{const} - \max_{\substack{\mathbf{x}_{\beta(i) \setminus j} \\ \mathbf{z}_i = \mathbf{A}_i \mathbf{x}}} \left[\frac{1}{2} \sum_{r \in \beta(i) \neq j} \|\mathbf{x}_r - \hat{\mathbf{x}}_{i \leftarrow r}(t)\|_{\mathbf{Q}_r^x(t)}^2 \right], \quad (53)$$

where the constant term does not depend on $\mathbf{x}_j$ or $\mathbf{z}_i$.

To proceed, we need to consider two cases separately: when $j \in \beta(i)$ and when $j \notin \beta(i)$. First consider the case when $j \in \beta(i)$. That is, (i, j) is a weak edge. In this case, a standard least squares calculation shows that (53) reduces to

$$\Delta_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i) \approx \text{const} - \frac{1}{2} \|\mathbf{z}_i - \mathbf{A}_{ij} \mathbf{x}_{i \leftarrow j}(t) - \hat{\mathbf{p}}_{i \leftarrow j}(t)\|_{\mathbf{Q}_{i \rightarrow j}^p(t)}^2, \quad (54)$$

where

$$\hat{\mathbf{p}}_{i \rightarrow j}(t) = \sum_{r \in \beta(i) \neq j} \mathbf{A}_{ir} \hat{\mathbf{x}}_{i \leftarrow r}(t) \quad (55a)$$

$$\mathbf{Q}_{i \rightarrow j}^p(t) = \sum_{r \in \beta(i) \neq j} \mathbf{A}_{ir} \mathbf{Q}_r^x(t) \mathbf{A}_{ir}^*. \quad (55b)$$

Also, when $j \in \beta(i)$, the assumption that $\alpha(i)$ and $\beta(i)$ are disjoint implies that $j \notin \alpha(i)$. In this case, $\Delta_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_j, \mathbf{z}_i)$ in (50a) with the objective function (48a) will not depend on $\mathbf{x}_j$, so we can write

$$\Delta_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_j, \mathbf{z}_i) = \Delta_i^{\text{strong}}(t, \mathbf{z}_i) := \max_{\mathbf{x}} \left[f_i(\mathbf{x}_{\alpha(i)}, \mathbf{z}_i) + \sum_{r \in \alpha(i)} \Delta_{i \leftarrow r}(t, \mathbf{x}_r) \right], \quad (56)$$

where the maximization is over all $\mathbf{x}_r$ for $r \in \alpha(i)$. Combining (49), (54) and (56), we can write that, for all weak edges (i, j) ,

$$\Delta_{i \rightarrow j}(t, \mathbf{x}_j) \approx G_i(t, \hat{\mathbf{p}}_{i \rightarrow j}(t) + \mathbf{A}_{ij} \mathbf{x}_j), \quad (57)$$

where

$$G_i(t, \hat{\mathbf{p}}_i) := \max_{\mathbf{x}_{\alpha(i)}, \mathbf{z}_i} H_i^z(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i, \hat{\mathbf{p}}_i, \mathbf{Q}_i^p(t)) \quad (58)$$

and $H_i^z(\cdot)$ is defined in (31a). Now, define

$$\hat{\mathbf{p}}_i(t) = \sum_{r \in \beta(i)} \mathbf{A}_{ir} \hat{\mathbf{x}}_{i \leftarrow r}(t) \quad (59a)$$

$$\mathbf{Q}_i^p(t) = \sum_{r \in \beta(i)} \mathbf{A}_{ir} \mathbf{Q}_r^x(t) \mathbf{A}_{ir}^*, \quad (59b)$$

so that the expressions in (55) can be re-written as

$$\hat{\mathbf{p}}_{i \rightarrow j}(t) = \hat{\mathbf{p}}_i(t) - \mathbf{A}_{ir} \hat{\mathbf{x}}_{i \leftarrow r}(t) \quad (60a)$$

$$\mathbf{Q}_{i \rightarrow j}^p(t) = \mathbf{Q}_i^p(t) - \mathbf{A}_{ir} \mathbf{Q}_r^x(t) \mathbf{A}_{ir}^*. \quad (60b)$$

Using (60), neglecting terms of order $O(\|\mathbf{A}_{ij}\|^2)$ and taking the approximation that $\hat{\mathbf{x}}_{i \leftarrow j}(t) \approx \hat{\mathbf{x}}_j(t)$, (57) can be further approximated as

$$\Delta_{i \rightarrow j}(t, \mathbf{x}_j) \approx G_i(t, \hat{\mathbf{p}}_i(t) + \mathbf{A}_{ij}(\mathbf{x}_j - \hat{\mathbf{x}}_j(t))) \quad (61)$$

Now let

$$\hat{\mathbf{s}}_i(t) = \frac{\partial}{\partial \mathbf{p}} G_i(t, \hat{\mathbf{p}}_i(t)) \quad (62a)$$

$$\mathbf{Q}_i^{-s}(t) = -\frac{\partial^2}{\partial \mathbf{p}^2} G_i(t, \hat{\mathbf{p}}_i(t)). \quad (62b)$$

Based on the definition of $G_i(\cdot)$ in (58) with $H_i^z(\cdot)$ defined in (31a), one can apply Lemma 1 to show that (62) agrees with (34). Also applying (62), we can take a second-order approximation of (61) as

$$\begin{aligned} \Delta_{i \rightarrow j}(t, \mathbf{x}_j) &\approx \text{const} \\ &+ \hat{\mathbf{s}}_i(t)^* \mathbf{A}_{ij}(\mathbf{x}_j - \hat{\mathbf{x}}_j(t)) - \frac{1}{2} \|\mathbf{A}_{ij}(\mathbf{x}_j - \hat{\mathbf{x}}_j(t))\|_{\mathbf{Q}_i^s(t)}^2 \\ &= \text{const} + [\mathbf{A}_{ij}^* \mathbf{s}_i(t) + \mathbf{A}_{ij}^* \mathbf{Q}_i^s(t) \mathbf{A}_{ij} \hat{\mathbf{x}}_j(t)]^* \mathbf{x}_j \\ &\quad + \frac{1}{2} \mathbf{x}_j^* \mathbf{A}_{ij}^* \mathbf{Q}_i^s(t) \mathbf{A}_{ij} \mathbf{x}_j \end{aligned} \quad (63)$$

for all weak edges (i, j) .

Next consider the case when $j \notin \beta(i)$ so that (i, j) is a strong edge. In this case, $\Delta_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i)$ in (53) does not depend on $\mathbf{x}_j$, so we can write

$$\Delta_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i) \approx \text{const} + \Delta_i^{\text{weak}}(t, \mathbf{z}_i), \quad (64)$$

where

$$\Delta_i^{\text{weak}}(t, \mathbf{z}_i) := \max_{\mathbf{x} : \mathbf{z}_i = \mathbf{A}_i \mathbf{x}} H_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_{\beta(i)}), \quad (65)$$

with the maximization being over $\mathbf{x}$ such that $\mathbf{z}_i = \mathbf{A}_i \mathbf{x}$. Using a similar least-squares calculations as above, $\Delta_i^{\text{weak}}(t, \mathbf{z}_i)$ is given by

$$\Delta_i^{\text{weak}}(t, \mathbf{z}_i) := -\frac{1}{2} \|\mathbf{z}_i - \hat{\mathbf{p}}_i(t)\|_{\mathbf{Q}_i^p(t)}^2, \quad (66)$$

and $\hat{\mathbf{p}}_i(t)$ and $\mathbf{Q}_i^p(t)$ are defined in (59). Combining (49), (64) and (66), we can write that, for all strong edges (i, j) ,

$$\begin{aligned} \Delta_{i \rightarrow j}(t, \mathbf{x}_j) &\approx \text{const} \\ &+ \max_{\mathbf{z}_i} \left[\Delta_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_j, \mathbf{z}_i) - \frac{1}{2} \|\mathbf{z}_i - \hat{\mathbf{p}}_i(t)\|_{\mathbf{Q}_i^p(t)}^2 \right] \end{aligned} \quad (67)$$

From (48a) and (50a), we see that (67) agrees with the factor node update (28) for the the strong edges.

We now turn to the variable node update (17) which we partition as

$$\Delta_{i \leftarrow j}(t, \mathbf{x}_j) = \Delta_{i \leftarrow j}^{\text{weak}}(t, \mathbf{x}_j) + \Delta_{i \leftarrow j}^{\text{strong}}(t, \mathbf{x}_j), \quad (68)$$

where

$$\Delta_{i \leftarrow j}^{\text{strong}}(t+1, \mathbf{x}_j) = \sum_{\ell \neq i : j \in \alpha(\ell)} \Delta_{\ell \rightarrow j}(t, \mathbf{x}_j) \quad (69a)$$

$$\Delta_{i \leftarrow j}^{\text{weak}}(t+1, \mathbf{x}_j) = \sum_{\ell \neq i : j \in \beta(\ell)} \Delta_{\ell \rightarrow j}(t, \mathbf{x}_j). \quad (69b)$$

Substituting the approximation (63) into the summation (69b)

$$\Delta_{i \leftarrow j}^{\text{weak}}(t+1, \mathbf{x}_j) \approx -\frac{1}{2} \|\hat{\mathbf{r}}_{i \leftarrow j}(t) - \mathbf{x}_j\|_{\mathbf{Q}_{i \leftarrow j}^r(t)}^2, \quad (70)$$

where

$$\mathbf{Q}_{i \leftarrow j}^{-r}(t) = \sum_{\ell \neq i} \mathbf{A}_{\ell j}^* \mathbf{Q}_{\ell}^s(t) \mathbf{A}_{\ell j} \quad (71a)$$

$$\begin{aligned} \hat{\mathbf{r}}_{i \leftarrow j}(t) &= \mathbf{Q}_{i \leftarrow j}^r(t) \\ &\times \left[\sum_{\ell \neq i} \mathbf{A}_{\ell j}^* \hat{\mathbf{s}}_{\ell}(t) + \mathbf{A}_{\ell j}^* \mathbf{Q}_{\ell}^s(t) \mathbf{A}_{\ell j} \hat{\mathbf{x}}_j(t) \right] \\ &= \hat{\mathbf{x}}(t) + \mathbf{Q}_{i \leftarrow j}^r(t) \sum_{\ell \neq i} \mathbf{A}_{\ell j}^* \hat{\mathbf{s}}_{\ell}(t). \end{aligned} \quad (71b)$$

We now again consider two cases: when (i, j) is a weak edge and when it is a strong edge. First consider the weak edge case. In this case, $j \notin \alpha(i)$, so $\Delta_{i \leftarrow j}^{\text{strong}}(t+1, \mathbf{x}_j)$ in (69a) does not depend on i . Combining (68) and (70), we see that

$$\Delta_{i \leftarrow j}(t+1, \mathbf{x}_j) \approx H_j^x(t, \mathbf{x}_j, \hat{\mathbf{r}}_{i \leftarrow j}(t), \mathbf{Q}_{i \leftarrow j}^r(t)), \quad (72)$$

where $H_j^x(\cdot)$ is defined in (23). Also, comparing (35) with (71), we have that

$$\mathbf{Q}_{i \leftarrow j}^{-r}(t) \approx \mathbf{Q}_j^{-r}(t) \quad (73a)$$

$$\hat{\mathbf{r}}_{i \leftarrow j}(t) \approx \hat{\mathbf{r}}_j(t) - \mathbf{Q}_j^r(t) \mathbf{A}_{ij}^* \hat{\mathbf{s}}_i(t). \quad (73b)$$

Substituting (73) into (72) we get

$$\begin{aligned} \Delta_{i \leftarrow j}(t+1, \mathbf{x}_j) &\approx H_j^x(t, \mathbf{x}_j, \hat{\mathbf{r}}_j(t) - \mathbf{Q}_j^r(t) \mathbf{A}_{ij}^* \hat{\mathbf{s}}_i(t), \mathbf{Q}_j^r(t)). \end{aligned} \quad (74)$$

A similar set of calculations shows that $\Delta_j(t+1, \mathbf{x}_j)$ in (18) can be approximated as

$$\Delta_j(t+1, \mathbf{x}_j) \approx H_j^x(t, \mathbf{x}_j, \hat{\mathbf{r}}_j(t), \mathbf{Q}_j^r(t)). \quad (75)$$

Thus, the definitions of $\hat{\mathbf{x}}_j(t+1)$ and $\mathbf{Q}_j^x(t+1)$ in (51) agree with (24). Also, if we let

$$\Gamma_j(t, \hat{\mathbf{r}}_j) := \arg \max_{\mathbf{x}_j} H_j^x(t, \mathbf{x}_j, \hat{\mathbf{r}}_j, \mathbf{Q}_j^r(t)),$$

it follows from (51), (74) and (75) that

$$\begin{aligned} \hat{\mathbf{x}}_j(t+1) &\approx \Gamma_j(t, \hat{\mathbf{r}}_j(t)) \\ \hat{\mathbf{x}}_{i \leftarrow j}(t+1) &\approx \Gamma_j(t, \hat{\mathbf{r}}_j(t) - \mathbf{Q}_j^r(t) \mathbf{A}_{ij}^* \hat{\mathbf{s}}_i(t)) \\ &\approx \hat{\mathbf{x}}_j(t) - \frac{\partial \Gamma_j(t, \hat{\mathbf{r}}_j(t))}{\partial \hat{\mathbf{r}}_j} \mathbf{Q}_j^r(t) \mathbf{A}_{ij}^* \hat{\mathbf{s}}_i(t). \end{aligned} \quad (76)$$

It can be shown from Lemma 1 that

$$\begin{aligned} \frac{\partial \Gamma_j(t, \hat{\mathbf{r}}_j(t))}{\partial \hat{\mathbf{r}}_j} &= - \left[\frac{\partial^2}{\partial \mathbf{x}_j^2} H_j^x(t, \hat{\mathbf{x}}_j(t+1), \hat{\mathbf{r}}_j(t)) \right]^{-1} \mathbf{Q}^{-r}(t) \\ &\approx \mathbf{Q}^x(t) \mathbf{Q}^{-r}(t), \end{aligned}$$

and hence, from (76),

$$\hat{\mathbf{x}}_{i \leftarrow j}(t+1) \approx \hat{\mathbf{x}}_j(t+1) - \mathbf{Q}^x(t+1) \mathbf{A}_{ij}^* \hat{\mathbf{s}}_i(t). \quad (77)$$

Substituting (77) into (59) we obtain

$$\begin{aligned} \hat{\mathbf{p}}_i(t) &\approx \sum_{j \in \beta(i)} \mathbf{A}_{ij} \hat{\mathbf{x}}_j(t) - \sum_{j \in \beta(i)} \mathbf{A}_{ij} \mathbf{Q}^x(t) \mathbf{A}_{ij}^* \hat{\mathbf{s}}_i(t-1) \\ &\approx \mathbf{z}_i(t) - \mathbf{Q}^p(t) \hat{\mathbf{s}}_i(t-1), \end{aligned}$$

which agrees with the definition in (26).

APPENDIX B HEURISTIC DERIVATION OF SUM-PRODUCT HYBRID-GAMP

A. Preliminary Lemma

The derivation of the approximate sum-product algorithm is similar to the derivation in Appendix A for the max-sum algorithm. In particular, the analogue to Lemma 1 is as follows:

Lemma 2: Suppose that $\mathbf{W}$ and $\mathbf{V}$ are random vectors with a conditional probability distribution function of the form

$$p_{\mathbf{W}|\mathbf{V}}(\mathbf{w}|\mathbf{v}) = \frac{1}{Z(\mathbf{v})} \exp[uH(\mathbf{w}, \mathbf{v})],$$

where $H(\mathbf{w}, \mathbf{v})$ is given in (43), $u > 0$ is some constant and $Z(\mathbf{v})$ is a normalization constant (called the partition function). Then,

$$\frac{\partial}{\partial \mathbf{v}} \hat{\mathbf{x}}(\mathbf{v}) = \mathbf{D} \mathbf{Q}^{-v} \quad (78a)$$

$$\frac{\partial}{\partial \mathbf{v}} \log Z(\mathbf{v}) = \mathbf{Q}^{-v} (\hat{\mathbf{x}}(\mathbf{v}) - \mathbf{v}) \quad (78b)$$

$$\frac{\partial^2}{\partial \mathbf{v}^2} \log Z(\mathbf{v}) = -\mathbf{Q}^{-v} + \mathbf{Q}^{-v} \mathbf{D} \mathbf{Q}^{-v} \quad (78c)$$

where

$$\hat{\mathbf{x}}(\mathbf{v}) = \mathbb{E}[\mathbf{W} | \mathbf{V} = \mathbf{v}], \quad \mathbf{D} = u \text{var}(\mathbf{W} | \mathbf{V} = \mathbf{v}).$$

Proof: The relations are standard properties of exponential families [2]. ■

B. Approximation for Hybrid-GAMP

The derivation of the Hybrid-GAMP algorithm for the sum-product algorithm is similar to the derivation of the max-sum algorithm in Appendix A, so we will just sketch the proof here. Similar to the max-sum derivation, we first partition the function $H_{i \rightarrow j}(\cdot)$ in (13) as in (47). Then, the marginal distribution $p_{i \rightarrow j}(t, \mathbf{x}_j)$ of the distribution $p_{i \rightarrow j}(t, \mathbf{x}_{\partial(i)})$ in (16) can be re-written as

$$\begin{aligned} p_{i \rightarrow j}(t, \mathbf{x}_j) &= \int p_{i \rightarrow j}(t, \mathbf{x}_{\partial(i)}) d\mathbf{x}_{\partial(i) \setminus j} \\ &\propto \int \psi_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_j, \mathbf{z}_i) \psi_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i) d\mathbf{z}_i, \end{aligned} \quad (79)$$

where

$$\begin{aligned} \psi_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_j, \mathbf{z}_i) &\propto \int \exp[uH_{i \rightarrow j}^{\text{strong}}(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i)] d\mathbf{x}_{\alpha(i) \setminus j} \end{aligned} \quad (80a)$$

$$\begin{aligned} \psi_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i) &\propto \int \exp[uH_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_{\beta(i)})] d\mathbf{x}_{\beta(i) \setminus j} \end{aligned} \quad (80b)$$

where the integration in (80a) is over the variables $\mathbf{x}_r$ with $r \in \alpha(i) \neq j$, and the integration in (80b) is over the variables $\mathbf{x}_r$ with $r \in \beta(i) \neq j$, and $\mathbf{z}_i = \mathbf{A}_i \mathbf{x}$.

To approximate $p_{i \rightarrow j}(t, \mathbf{x}_j)$ in (79), we separately consider the cases when (i, j) is weak edge and when it is a strong

edge. We begin with the weak edge case. That is, $j \in \beta(i)$. Let

$$\hat{\mathbf{x}}_j(t) := \mathbb{E}[\mathbf{x}_j; \Delta_j(t, \cdot)], \quad (81a)$$

$$\hat{\mathbf{x}}_{i \leftarrow j}(t) := \mathbb{E}[\mathbf{x}_j; \Delta_{i \leftarrow j}(t, \cdot)], \quad (81b)$$

$$\mathbf{Q}_j^x(t) := u \text{var}[\mathbf{x}_j; \Delta_j(t, \cdot)] \quad (81c)$$

$$\mathbf{Q}_{i \leftarrow j}^x(t) := u \text{var}[\mathbf{x}_j; \Delta_{i \leftarrow j}(t, \cdot)], \quad (81d)$$

where we have used the notation $\mathbb{E}[g(\mathbf{x}); \Delta(\cdot)]$ from (12).

Now, using the expression for $H_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_{\beta(i)})$ in (48b), it can be verified that $\psi_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i)$ is equivalent to the probability distribution of a random variable

$$\mathbf{z}_i = \mathbf{A}_{ij}\mathbf{x}_j + \sum_{r \in \beta(i) \neq j} \mathbf{A}_{ir}\mathbf{x}_r, \quad (82)$$

with the variables $\mathbf{x}_r$ being independent with probability distribution

$$p(\mathbf{x}_r) \propto \exp(u\Delta_{i \leftarrow r}(\mathbf{x}_r)).$$

Moreover, $\hat{\mathbf{x}}_{i \leftarrow j}(t)$ and $\mathbf{Q}_{i \leftarrow j}^x(t)/u$ in (81) are precisely the mean and variance of the random variables $\mathbf{x}_j$ under this distribution. Therefore, if the summation in (82) is over a large number of terms, we can then use the Central Limit Theorem to approximate the variable in $\mathbf{z}_i$ in (82) as Gaussian, with distribution $\psi_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i)$ given by

$$\psi_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i) \approx \mathcal{N}(\mathbf{A}_{ij}\mathbf{x}_j + \hat{\mathbf{p}}_{i \rightarrow j}(t), \mathbf{Q}_{i \rightarrow j}^p(t)/u), \quad (83)$$

where $\hat{\mathbf{p}}_{i \rightarrow j}(t)$ and $\mathbf{Q}_{i \rightarrow j}^p(t)$ are given in (55). Applying this Gaussian approximation into the probability distribution $p_{i \rightarrow j}(t, \mathbf{x}_{\beta(i)}, \mathbf{z}_i)$ in (16), and then using the definitions in (48a) and (80a), we obtain the approximation for the message in (15)

$$\Delta_{i \rightarrow j}(t, \mathbf{x}_j) \approx G_i(t, \mathbf{A}_{ij}\mathbf{x}_j + \hat{\mathbf{p}}_{i \rightarrow j}(t), \mathbf{Q}_{i \rightarrow j}^p(t))$$

where

$$G_i(t, \mathbf{p}_i, \mathbf{Q}_i^p) := \frac{1}{u} \log \int \exp [uH_i^z(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i, \mathbf{p}_i, \mathbf{Q}_i^p)] d\mathbf{x}_{\alpha(i)} d\mathbf{z}_i \quad (84)$$

and $H_i^z(\cdot)$ is given in (31a).

We now define $\hat{\mathbf{p}}_i(t)$ and $\mathbf{Q}_i^p(t)$ as in (59), and similar to (62) let

$$\hat{\mathbf{s}}_i(t) = \frac{\partial}{\partial \hat{\mathbf{p}}} G_i(t, \hat{\mathbf{p}}_i(t), \mathbf{Q}_i^p(t)) \quad (85a)$$

$$\mathbf{Q}_i^{-s}(t) = -\frac{\partial^2}{\partial \hat{\mathbf{p}}^2} G_i(t, \hat{\mathbf{p}}_i(t), \mathbf{Q}_i^p(t)). \quad (85b)$$

Using Lemma 2 one can show that the definitions in (85) agree with the updates (34) where $\hat{\mathbf{z}}_i^0(t)$ and $\mathbf{Q}_i^z(t)$ are the mean and covariance of the random variable $\mathbf{z}_i$ with the distribution (33). Using a similar approximations as in the derivation of the max-sum algorithm, one can then obtain the quadratic approximation in (63) for $\Delta_{i \rightarrow j}(t, \mathbf{x}_j)$ for all weak edges (i, j) .

Next consider the case when $j \notin \beta(i)$ so that (i, j) is a strong edge. In this case, $\psi_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i)$ does not depend on $\mathbf{x}_j$ and a similar calculation as above shows that

$$\psi_{i \rightarrow j}^{\text{weak}}(t, \mathbf{x}_j, \mathbf{z}_i) \approx \psi_i^{\text{weak}}(t, \mathbf{z}_i) := \mathcal{N}(\hat{\mathbf{p}}_i(t), \mathbf{Q}_i^p(t)/u), \quad (86)$$

where $\hat{\mathbf{p}}_i(t)$ and $\mathbf{Q}_i^p(t)$ are defined in (59). Substituting the Gaussian approximation (86) into (16), and then using the definitions in (48a) and (80a), one can show that the marginal distribution $p_{i \rightarrow j}(t, \mathbf{x}_j)$ in (16) is equal to the marginal distribution of $p_{i \rightarrow j}(t, \mathbf{x}_{\alpha(i)}, \mathbf{z}_i)$ in (30). Therefore, the message $\Delta_{i \rightarrow j}(t, \mathbf{x}_j)$ in (15) can be written as (29) for all strong edges (i, j) .

We now turn to the variable update steps of the sum-product algorithm. Since this step is identical to the max-sum algorithm, one can follow the derivation in Appendix A to show that $\Delta_{i \leftarrow j}(t+1, \mathbf{x}_j)$ and $\Delta_i(t+1, \mathbf{x}_j)$ are given by (74) and (75), respectively and $\hat{\mathbf{r}}_j(t)$ and $\mathbf{Q}_j^r(t)$ are given in (35). Also, the definitions of $\hat{\mathbf{x}}_j(t)$ and $\mathbf{Q}_j^x(t)$ in (81a) and (81c) are consistent with (25).

Finally, define

$$\Gamma_j(t, \hat{\mathbf{r}}_j) := \mathbb{E}[\mathbf{x}_j; H_j^x(t, \cdot, \hat{\mathbf{r}}_j, \mathbf{Q}_j^r(t-1))], \quad (87)$$

where, again we are using the notation (12) and $H_j^x(\cdot)$ is defined in (23). It follows from (74), (75) and (81) that

$$\begin{aligned} \hat{\mathbf{x}}_j(t+1) &\approx \Gamma_j(t, \hat{\mathbf{r}}_j(t)) \\ \hat{\mathbf{x}}_{i \leftarrow j}(t+1) &\approx \Gamma_j(t, \hat{\mathbf{r}}_j(t) - \mathbf{Q}_j^r(t)\mathbf{A}_{ij}^*\hat{\mathbf{s}}_i(t)) \\ &\approx \hat{\mathbf{x}}_j(t) - \frac{\partial \Gamma_j(t, \hat{\mathbf{r}}_j(t))}{\partial \hat{\mathbf{r}}_j} \mathbf{Q}_j^r(t)\mathbf{A}_{ij}^*\hat{\mathbf{s}}_i(t). \end{aligned} \quad (88)$$

From the definition (87), Lemma 2 shows that

$$\frac{\partial \Gamma_j(t, \hat{\mathbf{r}}_j(t))}{\partial \hat{\mathbf{r}}_j} \approx \mathbf{Q}^x(t)\mathbf{Q}^{-r}(t), \quad (89)$$

and hence, from (88),

$$\hat{\mathbf{x}}_{i \leftarrow j}(t+1) \approx \hat{\mathbf{x}}_j(t+1) - \mathbf{Q}^x(t+1)\mathbf{A}_{ij}^*\hat{\mathbf{s}}_i(t). \quad (90)$$

The proof now follows identically to the derivation of the Hybrid-GAMP max-sum algorithm.

APPENDIX C

DERIVATION OF HYBRID-GAMP FOR GROUP SPARSITY

This Appendix provides a brief derivation of the steps in Algorithm 3 based on the general Hybrid-GAMP algorithm, Algorithm 2. In the description of the general Hybrid-GAMP algorithm, we used labels i and j for the factor and variable nodes. However, the group sparse estimation problem has a large number of indices. To avoid confusion, we adopt the following more explicit (albeit somewhat more cumbersome) labeling. The variables nodes will be labeled explicitly by x_j or ξ_k . For the factor nodes, we use the labels:

- a_i for the factors $p(y_i|z_i)$;
- b_j for the factors $P(x_j|\xi_{\gamma(j)})$; and
- c_k for the factors $P(\xi_k)$.

With this convention, for example, $\Delta_{b_j \leftarrow \xi_k}(t, \xi_k)$ represents the message from the variable node ξ_k to the factor node b_j when $j \in G_k$.

Now, in the graphical model in Fig. 4, the strong edges are all the edges to the right of the variables x_j . That is, the strong edges are:

- Between the variables x_j and factors b_j for all j ;
- Between the variables ξ_k and factors b_j for all $j \in G_k$; and

- Between the variables ξ_k and factors c_k for all k .

The remaining edges, those between the variables x_j and the factor nodes a_i , are all weak.

With these definitions, we can easily derive the steps in Algorithm 3 from the general Algorithm 2. First, note that all the steps from lines 10 to 18 are simply the weak edge updates in Algorithm 2, specialized to the case of scalar variables.

To understand the role of the remaining lines, first consider the message along the strong edge from the factor node c_k and the variable ξ_k . The factor node c_k corresponds to the prior $P(\xi_k)$ in (36). Since the factor is attached to only one variable node, the outgoing message in (29) for this edge reduces to

$$\Delta_{c_k \rightarrow \xi_k}(t, \xi_k) = \log P(\xi_k) = \begin{cases} \rho & \text{if } \xi_k = 1, \\ 1 - \rho & \text{if } \xi_k = 0, \end{cases} \quad (91)$$

where the last step follows from (36).

Next consider the message along the strong edge from the variable ξ_k to the factor node b_j for some $j \in G_k$. Similar to the case of binary LDPC codes [23], since $\xi_k = 0$ or 1 , it is convenient to work with log-likelihood ratios (LLRs). Given any strong edge between b_j and ξ_k , define the LLR,

$$\text{LLR}_{j \rightarrow k}(t) := \Delta_{b_j \rightarrow \xi_k}(t, \xi_k = 1) - \Delta_{b_j \rightarrow \xi_k}(t, \xi_k = 0). \quad (92)$$

The reverse LLR, $\text{LLR}_{j \leftarrow k}(t)$ is defined similarly.

Since the variable node ξ_k is not connected to any weak edges, the variable node output message in (21) reduces to

$$\Delta_{b_j \leftarrow \xi_k}(t+1, \xi_k) = \Delta_{c_k \rightarrow \xi_k}(t, \xi_k) + \sum_{i \in G_k, i \neq j} \Delta_{b_i \rightarrow \xi_k}(t, \xi_k).$$

Therefore the LLR in (92) is given by

$$\begin{aligned} \text{LLR}_{j \leftarrow k}(t+1) &= \Delta_{c_k \rightarrow \xi_k}(t, 1) - \Delta_{c_k \rightarrow \xi_k}(t, 0) \\ &\quad + \sum_{r \in G_k, r \neq j} \text{LLR}_{r \leftarrow k}(t) \\ &= \log \left(\frac{\rho}{1 - \rho} \right) + \sum_{r \in G_k, r \neq j} \text{LLR}_{r \rightarrow k}(t), \end{aligned} \quad (93)$$

where the last step follows from (91).

Next consider the message from b_j to x_j . Recall that the factor node b_j corresponds to the distribution $P(x_j | \xi_{\gamma(j)})$, defined by the variable x_j in (37). Also, this factor node has no weak edges. Hence, it can be verified, that the message (29), applied to the edge from the factor node b_j to x_j , is given by

$$\Delta_{b_j \rightarrow x_j}(t, x_j) = \log P_{b_j \rightarrow x_j}(t, x_j), \quad (94)$$

where $P_{b_j \rightarrow x_j}(t, x_j)$ is the probability distribution function

$$P_{b_j \rightarrow x_j}(t, x_j) = \mathbb{E}[P(x_j | \xi_{\gamma(j)})], \quad (95)$$

and the expectation is over independent variables ξ_k with

$$P(\xi_k = 1) = 1 - P(\xi_k = 0) = \frac{1}{1 + \exp(-\text{LLR}_{j \leftarrow k}(t))}. \quad (96)$$

Using the fact that the $P(x_j | \xi_{\gamma(j)})$ is the conditional distribution for the variable in (37), the probability distribution $P_{b_j \rightarrow x_j}(t, x_j)$ in (95) can be written

$$P_{b_j \rightarrow x_j}(t, x_j) = P_X(x_j; \hat{\rho} = \hat{\rho}_j(t)), \quad (97)$$

where $P_X(x; \hat{\rho})$ is the distribution for the variable X in (39) and $\hat{\rho}_j(t)$ is the probability

$$\begin{aligned} \hat{\rho}_j(t) &= \Pr(\xi_k = 0, \forall k \in \gamma(j)) \\ &= \prod_{k \in \gamma(j)} \frac{1}{1 + \exp(\text{LLR}_{j \leftarrow k}(t))}. \end{aligned} \quad (98)$$

Now, the variable node x_j has only one strong edge – the connection to the factor node b_j . Therefore, the log probability in (22) reduces to

$$\Delta_{x_j}(t+1, x_j) = \Delta_{b_j \rightarrow x_j}(t, x_j) - \frac{1}{2Q_j^r(t)} |\hat{r}_j(t) - x_j|^2. \quad (99)$$

Now, as described in equations (94) and (97), $\Delta_{b_j \rightarrow x_j}(t, x_j)$ is the log of the probability distribution for the variable X in (39) with $\hat{\rho}(t) = \hat{\rho}_j(t)$. Hence $\Delta_{x_j}(t+1, x_j)$ in (99) must be the log posterior distribution for the X with the measurement $R = \hat{r}(t)$ in (40). Therefore, the expectations and variances in (25) agree with the expressions in lines 8 and 9.

Finally, consider the message from the factor node b_j to a variable node ξ_k . The derivation for this message is similar to the message from b_j to x_j . Specifically, it can be verified that the factor node message (29), applied to the strong edge from b_j to ξ_k , is given by

$$\Delta_{b_j \rightarrow \xi_k}(t, \xi_k) = \log P_{b_j \rightarrow \xi_k}(t, \xi_k), \quad (100)$$

where $P_{b_j \rightarrow \xi_k}(t, \xi_k)$ is the probability mass function

$$\begin{aligned} P_{b_j \rightarrow \xi_k}(t, \xi_k) \\ = \int \exp \Delta_{b_j \leftarrow x_j}(t-1, x_j) \mathbb{E}(P(x_j | \xi_{\gamma(j)}) | \xi_k) dx_j, \end{aligned} \quad (101)$$

where the expectation is over independent variables ξ_k with probabilities in (96). To evaluate the expectation on the right-hand side of (101), consider the conditional expectation $\mathbb{E}(P(x_j | \xi_{\gamma(j)}) | \xi_k)$. Since the distribution $P(x_j | \xi_{\gamma(j)})$ corresponds to the random variable x_j in (37),

$$\begin{aligned} \mathbb{E}(P(x_j | \xi_{\gamma(j)}) | \xi_k) \\ = \begin{cases} P_X(x_j; \hat{\rho} = 1) & \text{if } \xi_k = 1 \\ P_X(x_j; \hat{\rho} = \hat{\rho}_{j \rightarrow k}(t)) & \text{if } \xi_k = 0, \end{cases} \end{aligned} \quad (102)$$

where $P_X(x; \hat{\rho})$ is the probability distribution for the random variable X in (39) and

$$\begin{aligned} \hat{\rho}_{j \rightarrow k}(t) &= 1 - \Pr(\xi_i = 0, \forall i \in \gamma(j) \neq k) \\ &= 1 - \prod_{i \in \gamma(j) \neq k} \frac{1}{1 + \exp(\text{LLR}_{i \leftarrow k}(t))}. \end{aligned} \quad (103)$$

Also, the edge from variable node x_j to the factor node b_j is the only strong edge connected to x_j . Therefore, the variable node message (21) applied to that edge reduces to

$$\Delta_{b_j \leftarrow x_j}(t-1, x_j) = -\frac{1}{2Q_j^r(t-1)} |x_j - \hat{r}_j(t-1)|^2. \quad (104)$$

Substituting (102) and (104) into (101) we obtain that

$$\begin{aligned} P_{b_j \rightarrow \xi_k}(t, \xi_k) \\ \propto \begin{cases} p_R(\hat{r}_j(t-1); Q_j^r(t-1), 1) & \text{if } \xi_k = 1 \\ p_R(\hat{r}_j(t-1); Q_j^r(t-1), \hat{\rho}_{j \rightarrow k}(t)) & \text{if } \xi_k = 0, \end{cases} \end{aligned} \quad (105)$$

where $p_R(r; Q^r, \hat{\rho})$ is the probability distribution of the scalar random variable R in (40) with X being distributed in (39). The LLR corresponding to (105) is thus given by

$$\begin{aligned} \text{LLR}_{j \rightarrow k}(t) &= \log P_{b_j \rightarrow \xi_k}(t, \xi_k = 1) \\ &\quad - P_{b_j \rightarrow \xi_k}(t, \xi_k = 0) \\ &= \log p_R(\hat{r}_j(t-1); Q_j^r(t-1), \hat{\rho} = 1) - \\ &\quad - \log p_R(\hat{r}_j(t-1); Q_j^r(t-1), \hat{\rho} = \hat{\rho}_{j \rightarrow k}(t)), \end{aligned}$$

which agrees with (41).

REFERENCES

- [1] B. J. Frey, *Graphical Models for Machine Learning and Digital Communication*. MIT Press, 1998.
- [2] M. J. Wainwright and M. I. Jordan, *Graphical Models, Exponential Families, and Variational Inference*, ser. Foundations and Trends in Machine Learning. Hanover, MA: NOW Publishers, 2008, vol. 1.
- [3] J. Boutros and G. Caire, "Iterative multiuser joint decoding: Unified framework and asymptotic analysis," *IEEE Trans. Inform. Theory*, vol. 48, no. 7, pp. 1772–1793, Jul. 2002.
- [4] T. Tanaka and M. Okada, "Approximate belief propagation, density evolution, and neurodynamics for CDMA multiuser detection," *IEEE Trans. Inform. Theory*, vol. 51, no. 2, pp. 700–706, Feb. 2005.
- [5] D. Guo and C.-C. Wang, "Asymptotic mean-square optimality of belief propagation for sparse linear systems," in *Proc. IEEE Inform. Theory Workshop*, Chengdu, China, Oct. 2006, pp. 194–198.
- [6] —, "Random sparse linear systems observed via arbitrary channels: A decoupling principle," in *Proc. IEEE Int. Symp. Inform. Theory*, Nice, France, Jun. 2007, pp. 946–950.
- [7] S. Rangan, "Estimation with random linear mixing, belief propagation and compressed sensing," arXiv:1001.2228v1 [cs.IT], Jan. 2010.
- [8] D. L. Donoho, A. Maleki, and A. Montanari, "Message-passing algorithms for compressed sensing," *Proc. Nat. Acad. Sci.*, vol. 106, no. 45, pp. 18 914–18 919, Nov. 2009.
- [9] M. Bayati and A. Montanari, "The dynamics of message passing on dense graphs, with applications to compressed sensing," *IEEE Trans. Inform. Theory*, vol. 57, no. 2, pp. 764–785, Feb. 2011.
- [10] P. Schniter, "Turbo reconstruction of structured sparse signals," in *Proc. Conf. on Inform. Sci. & Sys.*, Princeton, NJ, Mar. 2010.
- [11] J. Ziniel, L. C. Potter, and P. Schniter, "Tracking and smoothing of time-varying sparse signals via approximate belief propagation," in *Conf. Rec. Asilomar Conf. on Signals, Syst. & Computers*, Pacific Grove, CA, Nov. 2010.
- [12] S. Som, L. C. Potter, and P. Schniter, "Compressive imaging using approximate message passing and a Markov-tree prior," in *Conf. Rec. Asilomar Conf. on Signals, Syst. & Computers*, Pacific Grove, CA, Nov. 2010.
- [13] P. Schniter, "A message-passing receiver for BICM-OFDM over unknown clustered-sparse channels," in *Proc. IEEE Workshop Signal Process. Adv. Wireless Commun.*, San Francisco, CA, Jun. 2011.
- [14] G. Caire, A. Tulino, and E. Biglieri, "Iterative multiuser joint detection and parameter estimation: a factor-graph approach," in *Proc. IEEE Inform. Theory Workshop*, Cairns, Australia, Sep. 2001, pp. 36–38.
- [15] S. Rangan and R. K. Madan, "Belief propagation methods for intercell interference coordination," in *Proc. IEEE Infocom*, Shanghai, China, Apr. 2011.
- [16] A. Montanari, "Graphical models concepts in compressed sensing," arXiv:1011.4328v3 [cs.IT], Mar. 2011.
- [17] A. Dembo and O. Zeitouni, *Large Deviations Techniques and Applications*. New York: Springer, 1998.
- [18] S. Rangan, "Generalized approximate message passing for estimation with random linear mixing," arXiv:1010.5141v1 [cs.IT], Oct. 2010.
- [19] A. Montanari and D. Tse, "Analysis of belief propagation for non-linear problems: The example of CDMA (or: How to prove Tanaka's formula)," arXiv:cs/0602028v1 [cs.IT], Feb. 2006.
- [20] J. Pearl, *Probabilistic Reasoning in Intelligent Systems: Networks of Plausible Inference*. San Mateo, CA: Morgan Kaufmann Publ., 1988.
- [21] J. S. Yedidia, W. T. Freeman, and Y. Weiss, "Understanding belief propagation and its generalizations," in *Exploring Artificial Intelligence in the New Millennium*. San Francisco, CA: Morgan Kaufmann Publishers, 2003, pp. 239–269.
- [22] T. J. Richardson and R. L. Urbanke, "The capacity of low-density parity check codes under message-passing decoding," *IEEE Trans. Inform. Theory*, vol. 47, no. 2, pp. 599–618, Feb. 2001.
- [23] —, *Modern Coding Theory*. Cambridge, UK: Cambridge University Press, 2009.
- [24] D. M. Malioutov, J. K. Johnson, and A. S. Willsky, "Walk-sums and belief propagation in Gaussian graphical models," *J. Machine Learning Res.*, vol. 7, Dec. 2006.
- [25] G. Elidan, I. McGraw, and D. Koller, "Residual belief propagation: Informed scheduling for asynchronous message passing," in *Proc. Conf. on Uncertainty in AI*, Boston, MA, Jul. 2006.
- [26] M. Yuan and Y. Lin, "Model selection and estimation in regression with grouped variables," *J. Royal Statist. Soc.*, vol. 68, pp. 49–67, 2006.
- [27] P. Zhao, G. Rocha, and B. Yu, "The composite absolute penalties family for grouped and hierarchical variable selection," *Ann. Stat.*, vol. 37, no. 6, pp. 3468–3497, 2009.
- [28] Y. Kim, J. Kim, and Y. Kim, "Blockwise sparse regression," *Statistica Sinica*, vol. 16, pp. 375–390, 2006.
- [29] L. Meier, S. van de Geer, and P. Bühlmann, "The group lasso for logistic regression," *J. Royal Statistical Society: Series B*, vol. 70, no. 1, pp. 53–71, 2008.
- [30] A. C. Lozano, G. Świrszcz, and N. Abe, "Group orthogonal matching pursuit for logistic regression," *J. Machine Learning Res.*, vol. 15, 2011.
- [31] N. S. Rao, R. D. Nowak, S. J. Wright, and N. G. Kingsbury, "Convex approaches to model wavelet sparsity patterns," arXiv:1104.4385 [cs.CV], Apr. 2011.
- [32] V. Cevher, P. Indyk, L. Carin, and R. Baraniuk, "Sparse signal recovery and acquisition with graphical models," *IEEE Signal Process. Mag.*, vol. 27, no. 6, pp. 92–103, Nov. 2010.
- [33] J. Kim, W. Chang, B. Jung, D. Baron, and J. C. Ye, "Belief propagation for joint sparse recovery," arXiv:1102.3289, Feb. 2011.
- [34] A. C. Lozano, G. Świrszcz, and N. Abe, "Group orthogonal matching pursuit for variable selection and prediction," in *Proc. Neural Information Process. Syst.*, Vancouver, Canada, Dec. 2008.
- [35] S. J. Wright, R. D. Nowak, and M. Figueiredo, "Sparse reconstruction by separable approximation," *IEEE Trans. Signal Process.*, vol. 57, no. 7, pp. 2479–2493, Jul. 2009.
- [36] M. Figueiredo, S. J. Wright, and R. D. Nowak, "Gradient projection for sparse reconstruction: Application to compressed sensing and other inverse problems," *IEEE J. Sel. Topics Signal Process.*, vol. 1, no. 4, pp. 586–597, Dec. 2007.
- [37] S. Kim, K. Koh, M. Lustig, S. Boyd, and D. Gorinvesky, "An interior point method for large-scale ℓ_1 -regularized least squares," *IEEE J. Sel. Topics Signal Process.*, vol. 1, no. 4, pp. 606–617, Dec. 2007.
- [38] I. Daubechies, M. Deffrise, and C. D. Mol, "An iterative thresholding algorithm for linear inverse problems with a sparsity constraint," *Commun. Pure Appl. Math.*, vol. 57, no. 11, pp. 1413–1457, Nov. 2004.
- [39] S. Rangan et al., "Generalized approximate message passing," SourceForge.net project gampmatlab, available on-line at <http://gampmatlab.sourceforge.net/>.